



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.




2.54mm Pin Header, Round Pin, Straight

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50u* Ni

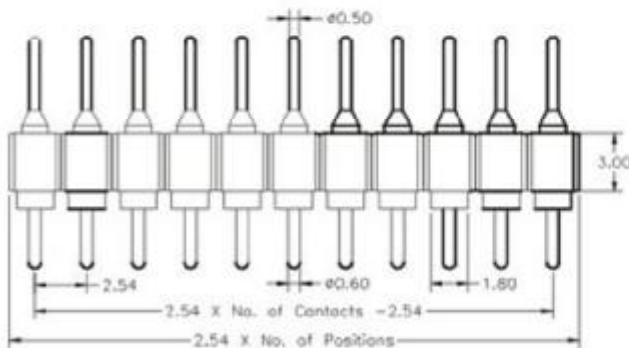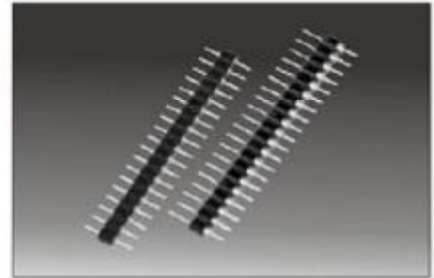

PCB LAYOUT



Ordering Information

3510	—	30	2	XX	S	S0	01
		Plastics Height 30=3.0mm	No. of Rows 1=Single Row 2=Dual Row	No. of Contacts 02~40		Contact Plating SN : Tin G0 : Gold Flash S0 : Gold Flash/Tin S3 : 10u* Gold/Tin S4 : 15u* Gold/Tin S5 : 30u* Gold/Tin Standard: S0	

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢