





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

0.8\*1.2mm Pin Header, Dual Row, S.M.T

### SPECIFICATIONS

Current Rating : 0.75AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 30mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Contact Material : Phosphor Bronze  
 Contact plating : Au over 50 u" Ni

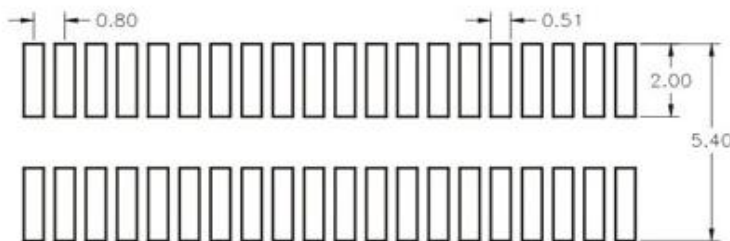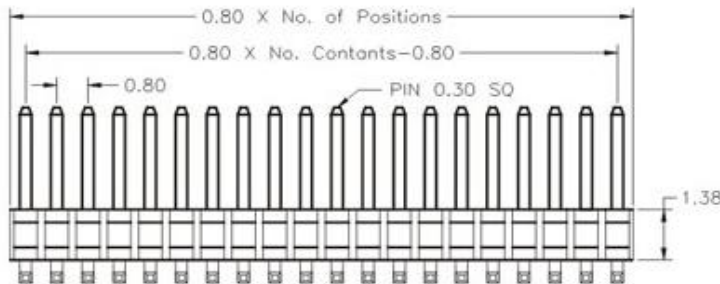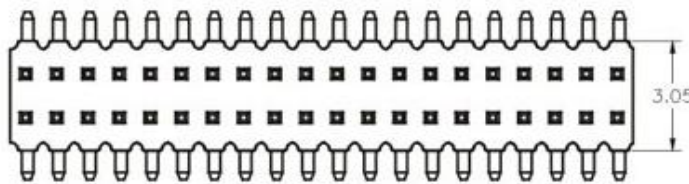

### PCB LAYOUT

### Ordering Information

1 6 14 — 1	2	XX	G0	M	XXX	01
	No. of Pins Per Row 01~50		Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		Pin Length $XXX = B + D + 1.38 + (W - 1.2) / 2$	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢