


深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

0.8*1.2mm Board Spacer, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 0.75AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : High Temperature
 Thermoplastic (UL94V-0)
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 uⁿ Ni

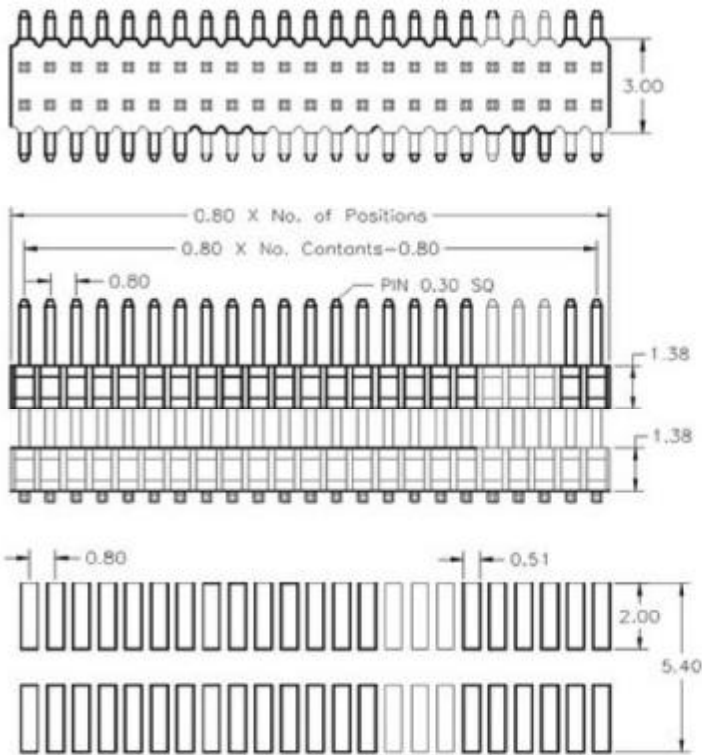

PCB LAYOUT

Ordering Information

1 6 14	—	2	2	XX	G0	M	XXX	01
		No. of Pins Per Row	Contact Plating		Pin Length			
		01~50	SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0		XXX=B+C+(W-1.2)/2			

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢