



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

### 1. 00mm Pin Header, Single/Dual Row, Straight

#### SPECIFICATIONS

Current Rating : 0.75AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 30mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Contact Material : Phosphor Bronze  
 Contact plating : Au over 50 u" Ni

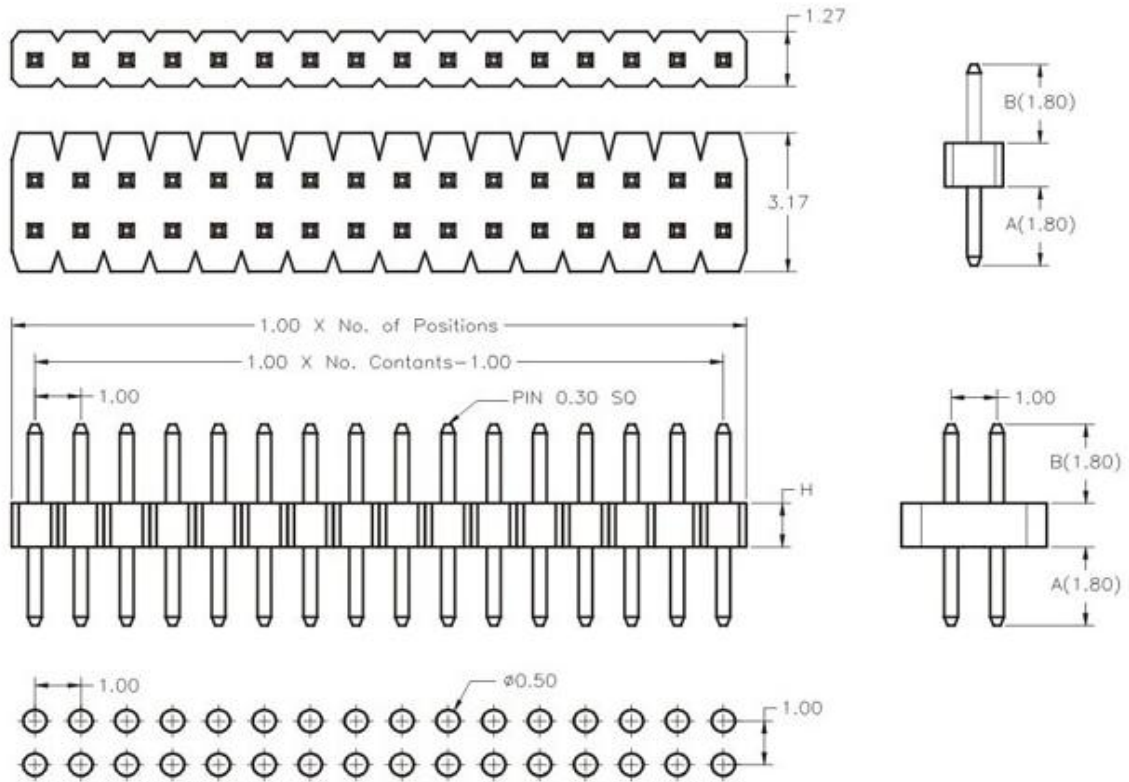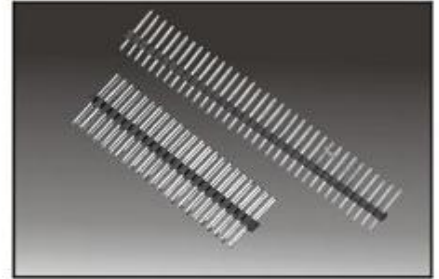

PCB LAYOUT

#### Ordering Information

1 5 10 — 1	1	XX	G0	S XXX 01
Plastics Height	No. of Rows	No. of Pins Per Row	Contact Plating	Pin Length
10=1.0mm 15=1.5mm	1=Single Row 2=Dual Row	01~50	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	XXX=A+B+H

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢