





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 1.00mm Board Spacer, Dual Row, Straight

#### SPECIFICATIONS

Current Rating : 0.75AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 30mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : High Temperature Thermoplastic (UL94V-0)  
 Contact Material : Phosphor Bronze  
 Contact plating : Au over 50 u" Ni

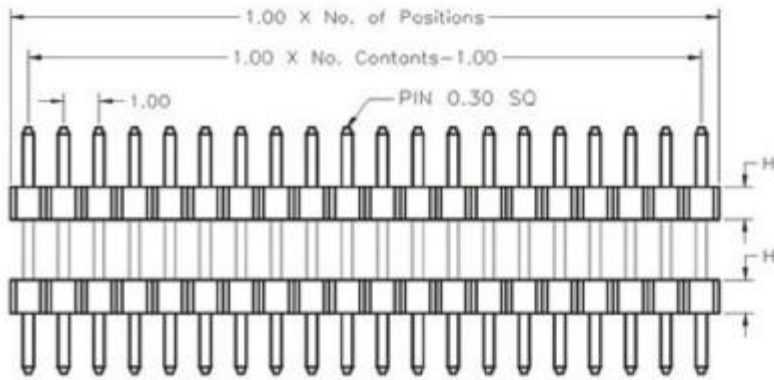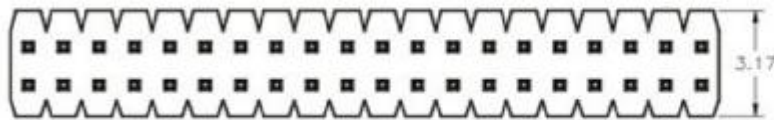

#### PCB LAYOUT

#### Ordering Information

1 5 10 — 2	2 XX	G0	S XXX 01
Plastics Height 10=1.0mm 15=1.5mm	No. of Pins Per Row 01~50	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	Pin Length XXX=A+B+C

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢