






深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

1. 27mm, 0.40SQ Pin Header, Single Row, Straight/Right Angle

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn Over 50uⁿ Ni

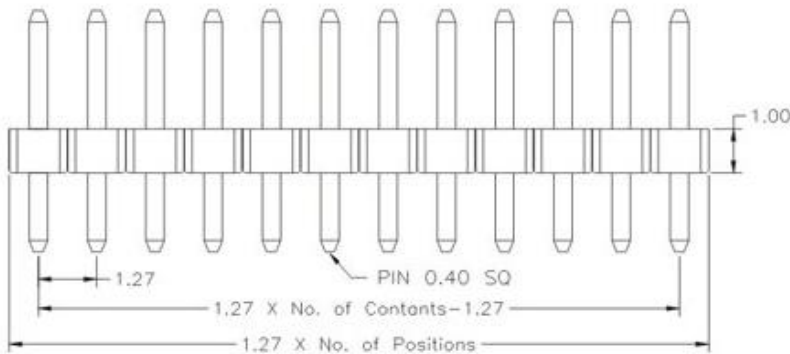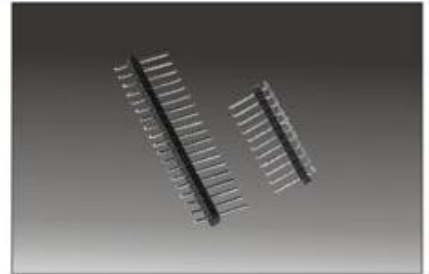

PCB LAYOUT

Ordering Information

1	3	10	—	1	1	XX	G0	S	XXX	01
				No. of Pins Per Row	Contact Plating			Connector Type	Pin Length	
				01~50	SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0			S=Straight R=Right Angle	XXX=A+B+1.00 XXX=A+D+1.00+B+1.05	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢