

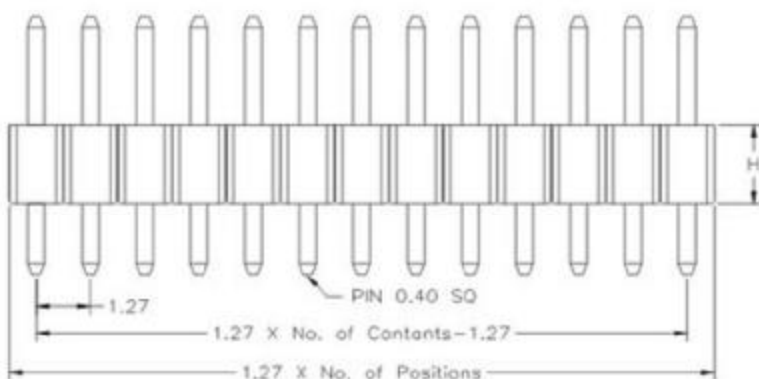


深圳市永连旺电子有限公司 Shenzhen Yonglianwang Electronic CO.,LTD.


1. 27mm, 0.40SQ Pin Header, Single Row, Straight/Right Angle

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn Over 50u" Ni

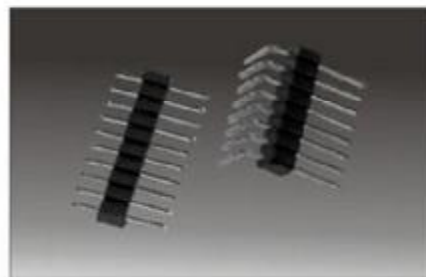

PCB LAYOUT



Ordering Information

1 3 20	—	1	1	XX	G0	S	XXX	01
Plastics Height		No. of Pins Per Row		Contact Plating	Connector Type		Pin Length	
06=0.65mm 20=2.00mm		01~50		SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	S=Straight R=Right Angle		XXX=A+B+H XXX=A+B+H+D+1.25	

Tel : 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢