


# 深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.


## 1. 27mm, 0.40SQ Board Spacer, Single Row, S. M. T

### SPECIFICATIONS




Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Brass  
 Contact plating : Au or Sn Over 50u" Ni

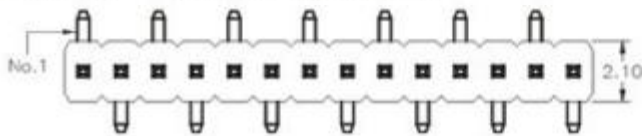


TYPE 1

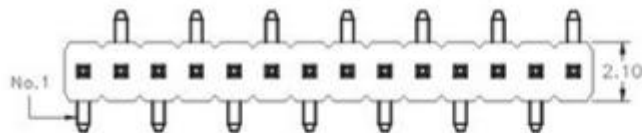

TYPE 2

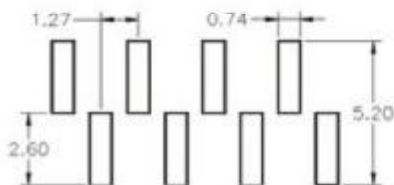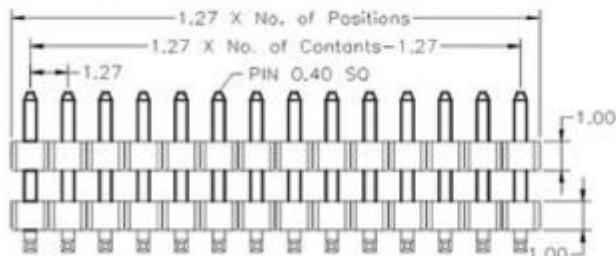

TYPE 1

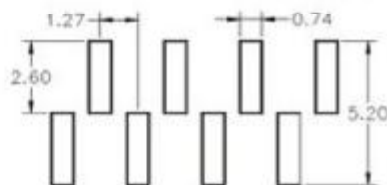

TYPE 2

### PCB LAYOUT

### Ordering Information

1	3	10	—	2	1	XX	G0	M	XXX	01	
					No. of Pins Per Row 01~50		Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		Pin Length XXX=B+C+D+W/2		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢