


深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.


1. 27mm, 0.46SQ Pin Header, Single Row, S. M. T

SPECIFICATIONS




Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn Over 50uⁿ Ni

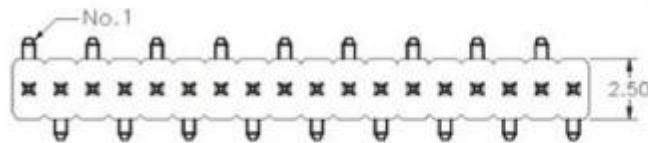


TYPE 1

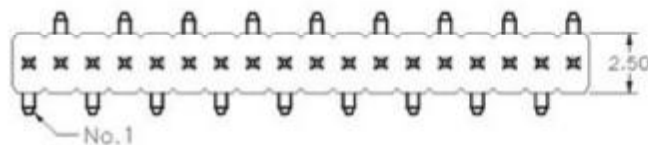

TYPE 2

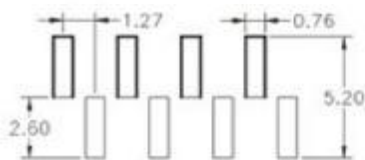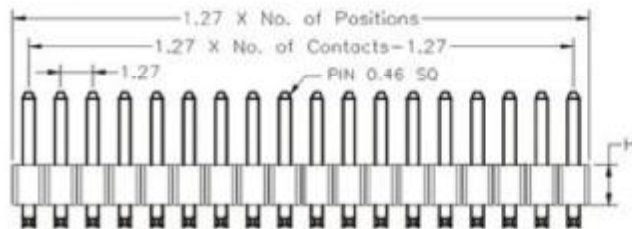

TYPE 1

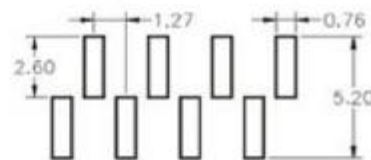

TYPE 2

PCB LAYOUT

Ordering Information

1 3 25 — 1	1 XX	G0	M XXX	01
Plastics Height 17=1.7mm 25=2.54mm	No. of Pins Per Row 01~50	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0	Pin Length XXX=B+H+D+W/2	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢