







深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

1. 27mm Pin Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn Over 50u* Ni

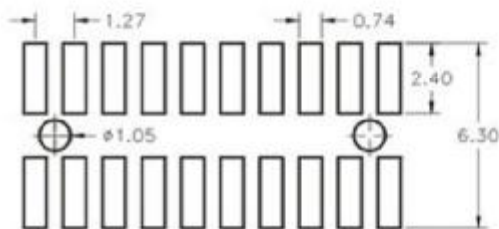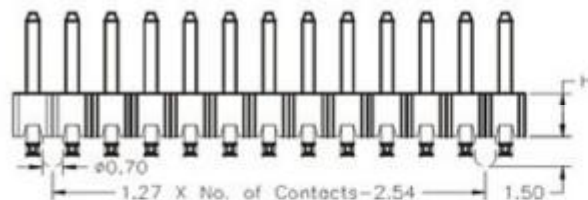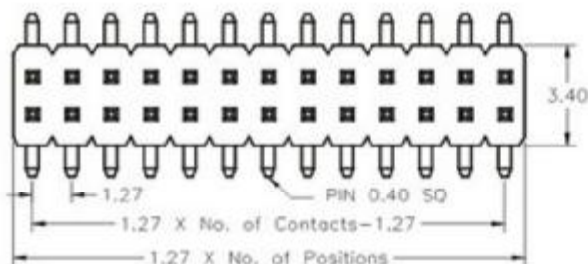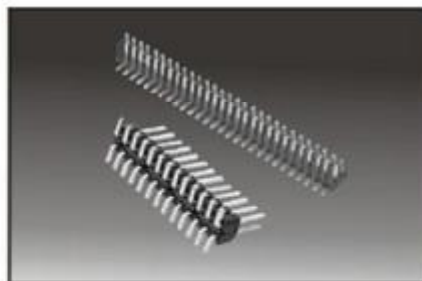

PCB LAYOUT

Ordering Information

1 3 15 — 1	2 XX	G0	M XXX 01
Plastics Height	No. of Pins Per Row	Contact Plating	Pin Length
08=0.85mm 10=1.0mm 15=1.5mm	01~50	SN : Tin G0 : Gold Flash G2 : 5u* Gold G3 : 10u* Gold G4 : 15u* Gold G5 : 30u* Gold S0 : Gold Flash/Tin Standard: G0	XXX=B+D+H+(W-1.27)/2

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢