



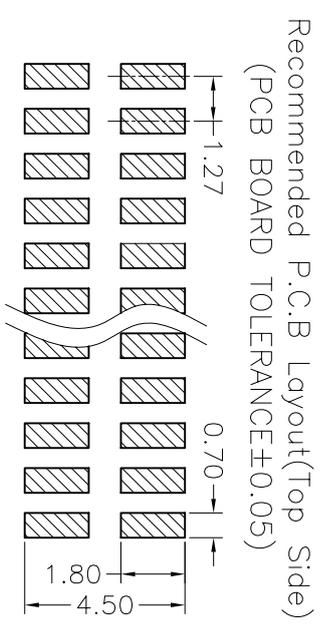

NOTES:



- Current Rating:1AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40°C to +105°C
- Contact Material:Brass
- Contact plating:Au or Sn Over Ni
- Insulator Material:PA6T+30%GF(UL94V-0)

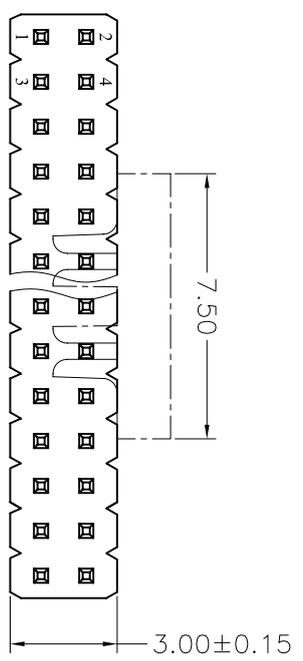

XXX XX Z XXX L

No. of Pins per Contact Plating Pin length(short)
Row: 01~50
G0=Gold Flash L=B+4.9±0.3

- G2=3u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- S0=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin

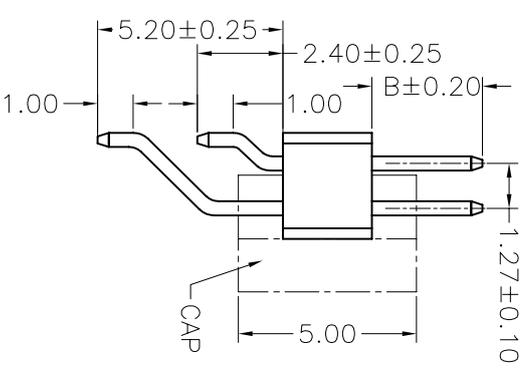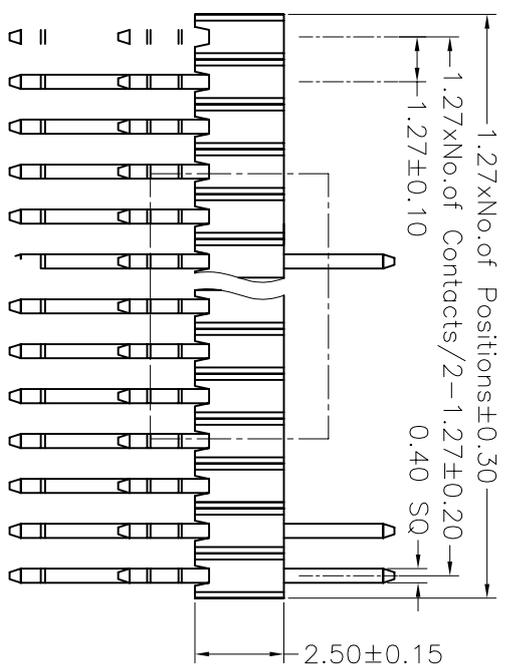

Dimension attributes list	
ITEM	B
Standard	3.00
Alternate	

OPERATION		DRAW		SCALE		PART NO.	
X.X	±0.40		WEI XD	5:1			
X.XX	±0.25		DESIGN	mm			
X.XXX	±0.15		CHECK	A4			
Angle	± 3'		APPROVE	1/1	TITLE:		
DIM	TOL			PROJ.	Customer NO.		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE APPROVE
A0	08/04/14	NEW	

深圳市永连旺电子有限公司

PH1.27 DUAL ROW 90° SMT H=2.50