






# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

### 1.27\*2.54mm Board Spacer, Dual Row, S.M.T

#### SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Brass  
 Contact plating : Au or Sn Over 50u\* Ni

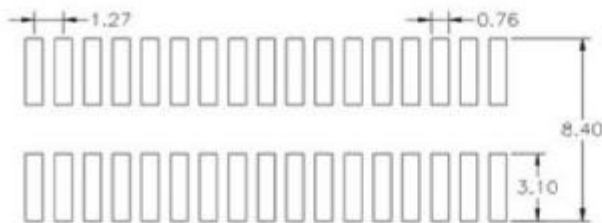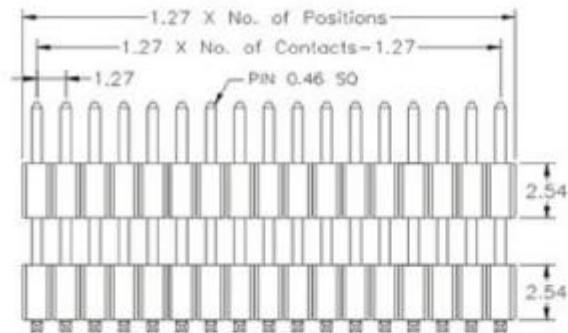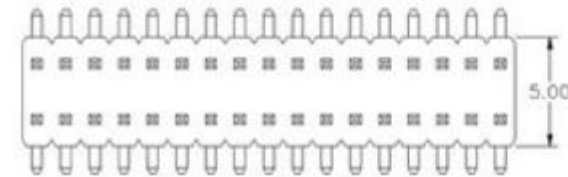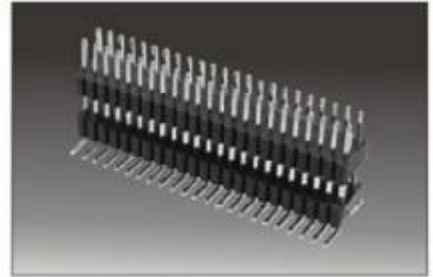

#### PCB LAYOUT

#### Ordering Information

1 4 25	—	2	2	XX	G0	M	XXX	01
		No. of Pins Per Row		Contact Plating		Pin Length		
		01~50		SN : Tin G0 : Gold Flash G2 : 5u* Gold G3 : 10u* Gold G4 : 15u* Gold G5 : 30u* Gold S0 : Gold Flash/Tin Standard: G0		XXX=B+C+(W-2.54)/2		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢