






深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.00mm Pin Header, Dual Row, Straight/Right Angle


SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Brass
 Contact plating : Au or Sn over 50uⁿ Ni

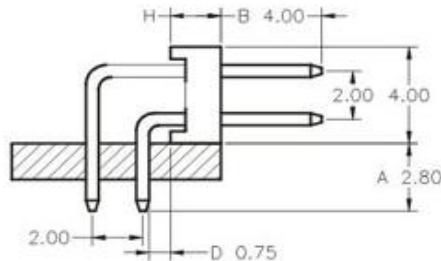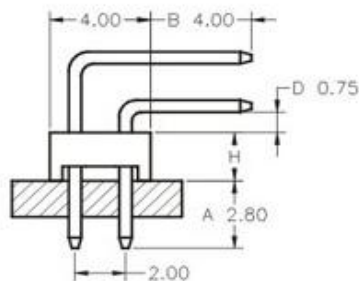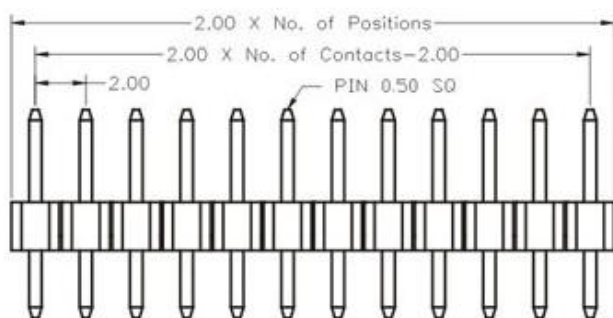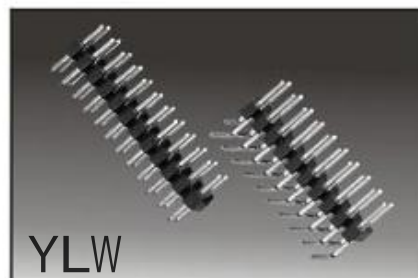

R2 Type

R1 Type



PCB LAYOUT

Ordering Information

1 2 20 — 1	2 XX	G0	S	XXX 01
Plastics Height	No. of Pins Per Row	Contact Plating	Connector Type	Pin Length
15=1.5mm 20=2.0mm	01~40	SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0	S=Straight S=Right Angle	XXX=A+B+H XXX=A+B+H+D+1.0

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢