





深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.


2.00mm Pin Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

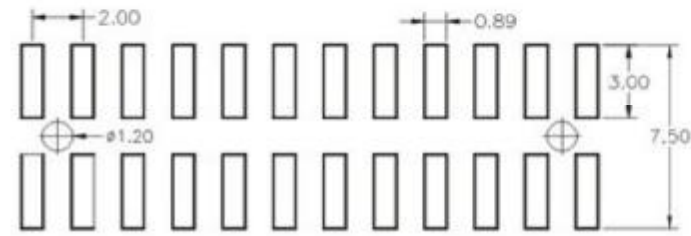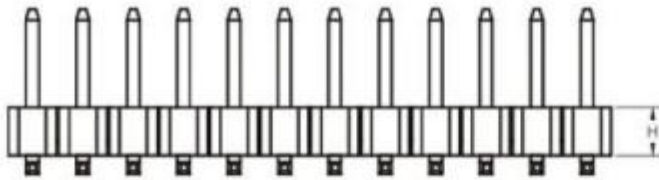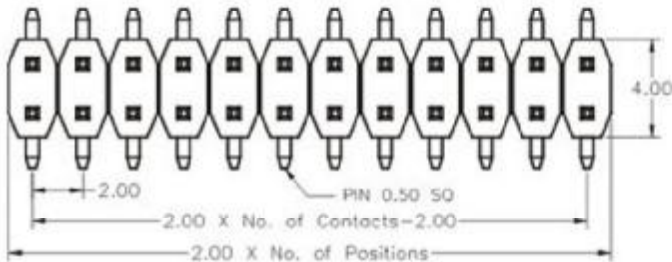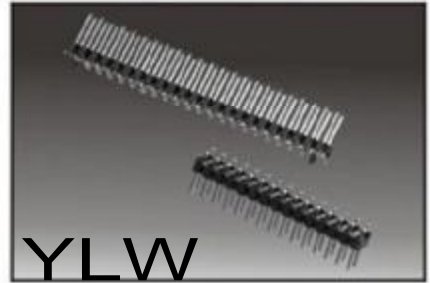

PCB LAYOUT

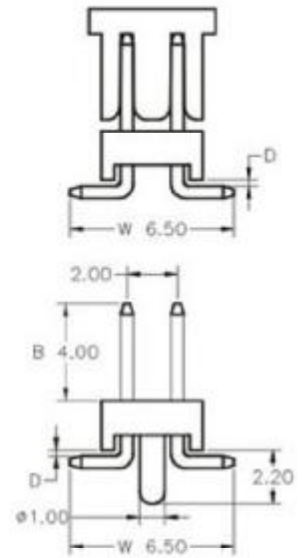

Ordering Information

1 2 20	—	1 2 XX	G0	M XXX 01
Plastics Height		No. of Pins Per Row	Contact Plating	Pin Length
15=1.5mm		01~40	SN : Tin	XXX=B+H+D+(W-2.0)/2
20=2.0mm			G0 : Gold Flash	
			G2 : 5u" Gold	
			G3 : 10u" Gold	
			G4 : 15u" Gold	
			G5 : 30u" Gold	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢