



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 2.00mm Board Spacer, Single Row, Straight/Right Angle

#### SPECIFICATIONS

Current Rating : 1.5AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-66  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni

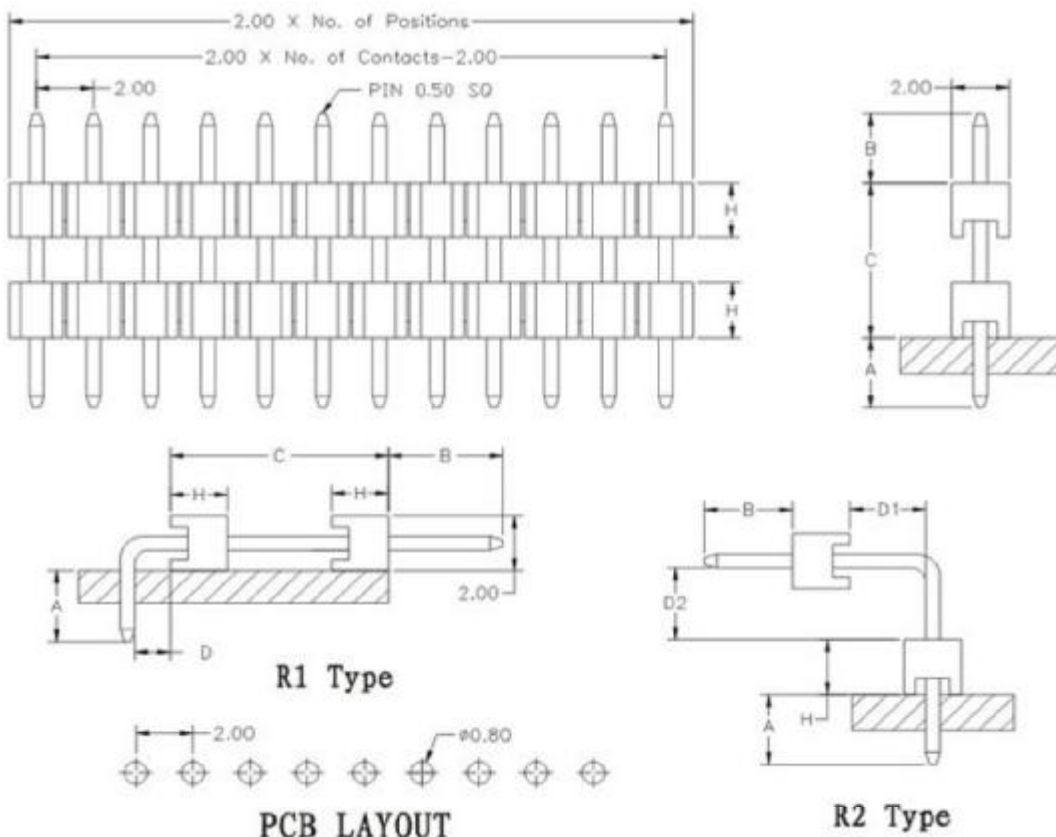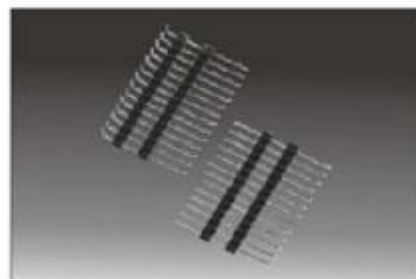

#### Ordering Information

1	2	20	—	2	1	XX	G0	S	XXX	01
Plastics Height		No. of Pins Per Row			Contact Plating		Connector Type		Pin Length	
15=1.5mm 20=2.0mm		01~40			SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		S=Straight S=Right Angle		XXX=A+B+C XXX=A+D+C+B+1.00 XXX=A+B+D1+D2+2H+0.25	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢