



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.


2.00mm Board Spacer, Single Row, S.M.T

SPECIFICATIONS




Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn over 50u* Ni

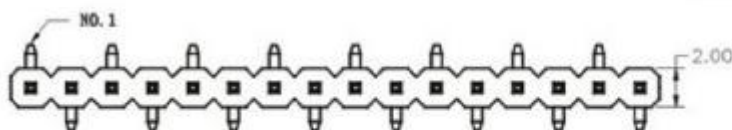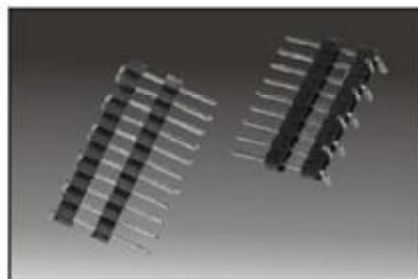


TYPE 1

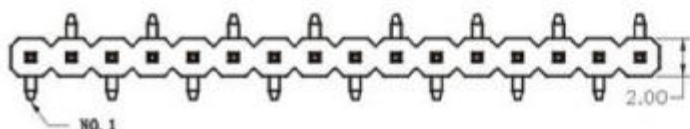

TYPE 2

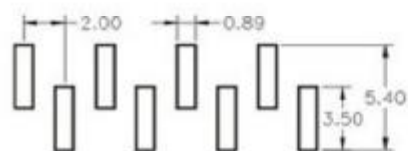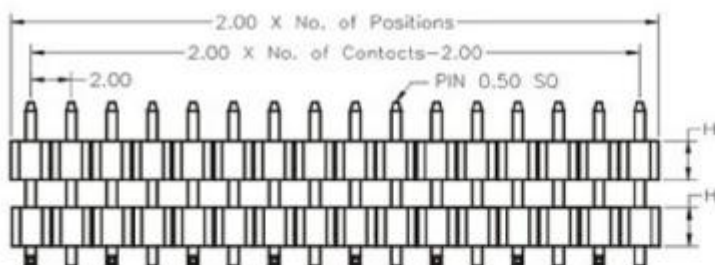

TYPE 1

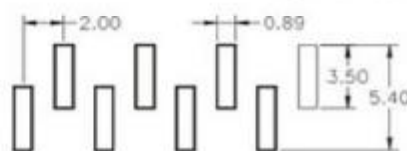

TYPE 2

PCB LAYOUT

Ordering Information

1 2 20 — 2

Plastics Height

15=1.5mm
20=2.0mm

1 XX

No. of Pins Per Row

01~40

G0

Contact Plating

SN : Tin
 G0 : Gold Flash
 G2 : 5u* Gold
 G3 : 10u* Gold
 G4 : 15u* Gold
 G5 : 30u* Gold
 S0 : Gold Flash/Tin
 Standard: G0

M XXX

Pin Length

XXX=B+C+D+W/2

01

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢