



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.00mm Board Spacer, Dual Row, Straight/Right Angle

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Brass
 Contact plating : Au or Sn over 50uⁿ Ni

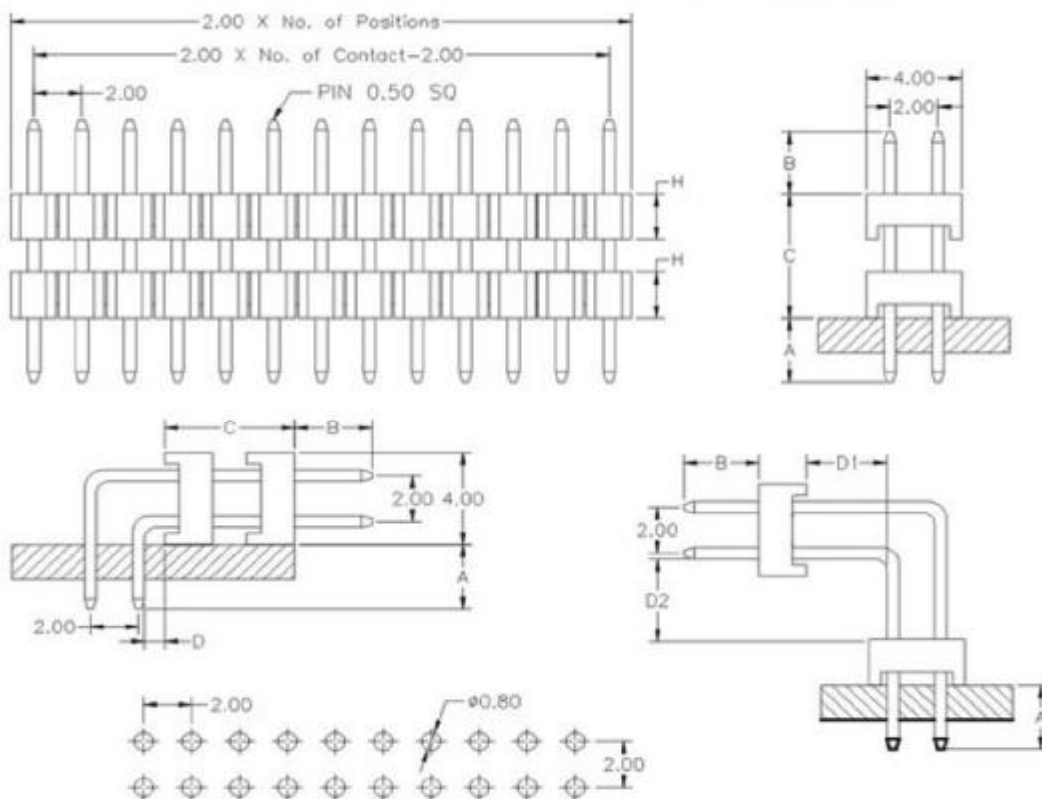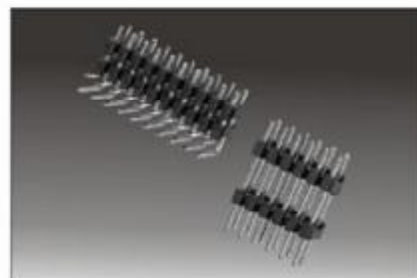

PCB LAYOUT

Ordering Information

1 2 20	2	2	XX	G0	S	XXX	01
Plastics Height	No. of Pins Per Row	Contact Plating	Connector Type	Pin Length			
15=1.5mm 20=2.0mm	01~40	SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0	S-Straight S-Right Angle	XXX=A+B+C XXX=A+D+C+B+1.00 XXX=A+B+D1+D2+2H+0.25			

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢