# 2.00mm Board Spacer, Dual Row, S.M.T

## SPECIFICATIONS

Current Rating : 1.5AMP
Operation Temperature: -40° C to+105° C
Contact Resistance : 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
WithstandING Voltage : AC 500V
Insulator Material : Polyester (UL94V-0)
Standard: Nylon-6T
Contact Material : Brass
Contact plating : Au or Sn over 50u" Ni

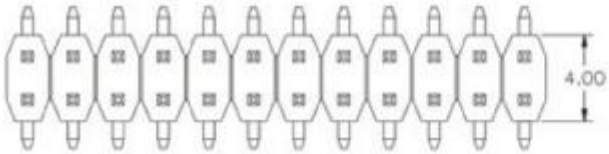


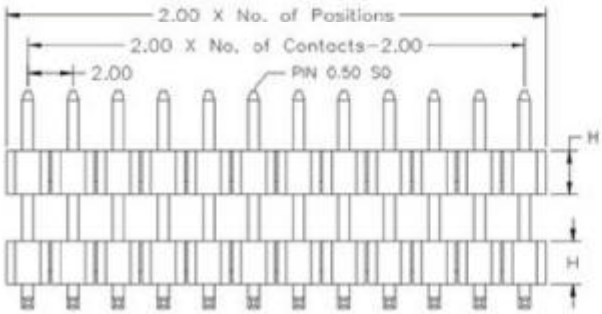





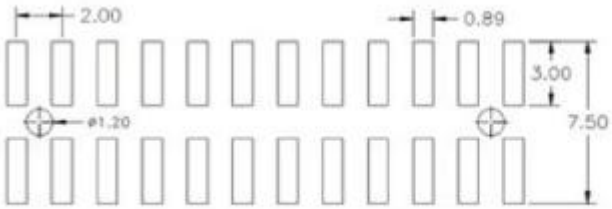


PCB LAYOUT




## Ordering Information

1 2 20 — 2 2 XX G0 M XXX 01

**Plastics Height**
15=1.5mm
20=2.0mm

**No. of Pins Per Row**
01~40

**Contact Plating**
SN : Tin
G0 : Gold Flash
G2 : 5u" Gold
G3 : 10u" Gold
G4 : 15u" Gold
G5 : 30u" Gold
S0 : Gold Flash/Tin
Standard: G0

**Pin Length**
XXX=B+C+D+(W-2.0)/2

Tel:86-0755-27367782 Fax:86-0755-27382610
Http://www.szyLconn.com E-mail:sales@szyLconn.com
地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢