





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

### 2.00mm Pin Header, Single Row, Right Angle

#### SPECIFICATIONS

Current Rating : 1.5AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-66  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u\* Ni

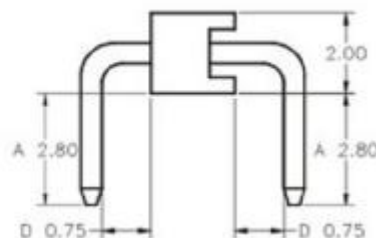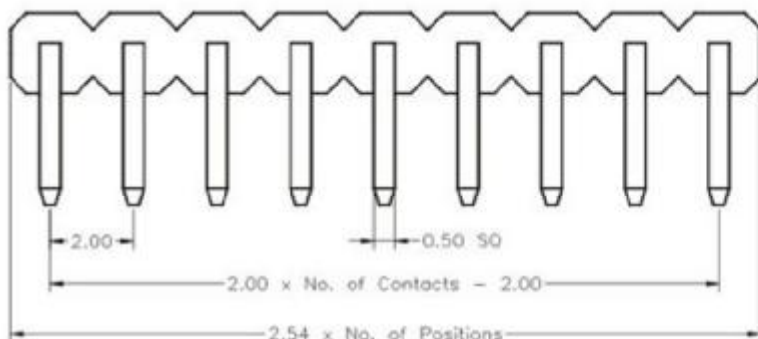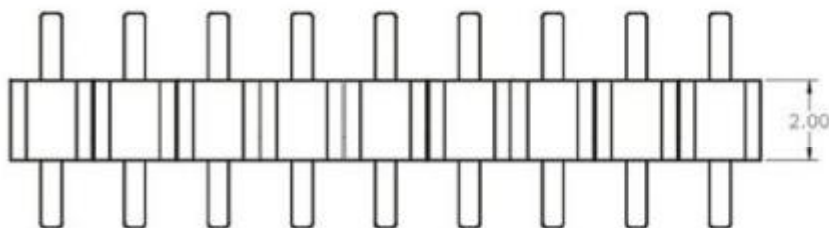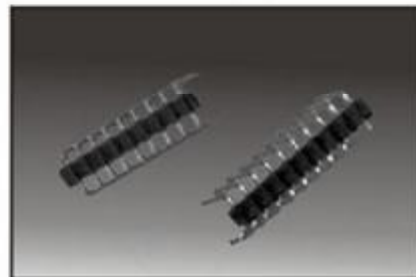

#### Ordering Information

1 2 20 — 1 1

XX  
 No. of Pins Per Row  
 01~40

G0  
 Contact Plating  
 SN : Tin  
 G0 : Gold Flash  
 G2 : 5u\* Gold  
 G3 : 10u\* Gold  
 G4 : 15u\* Gold  
 G5 : 30u\* Gold  
 S0 : Gold Flash/Tin  
 Standard: G0

R XXX 01  
 Pin Length  
 $XXX = (A + D + 1.0) * 2 + 2.00$

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢