



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.00mm Pin Header, Single Row, Right Angle, S.M.T

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Brass
 Contact plating : Au or Sn over 50u" Ni

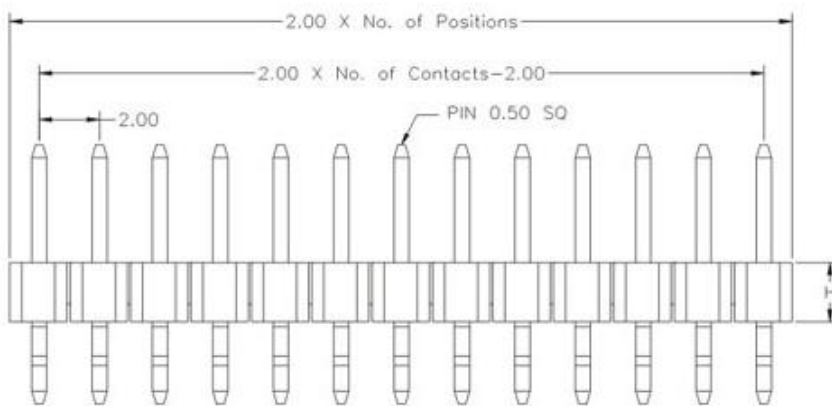

PCB LAYOUT

Ordering Information

1 2 20	—	1	1	XX	G0	Z	XXX	01
Plastics Height		No. of Pins Per Row		Contact Plating		Pin Length		
15=1.5mm 20=2.0mm		01~40		SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		XXX=B+A+1.80 XXX=B+A+2.30		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢