






深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.54mm Board Spacer, Dual Row, Straight/Right Angle


SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50uⁿ Ni

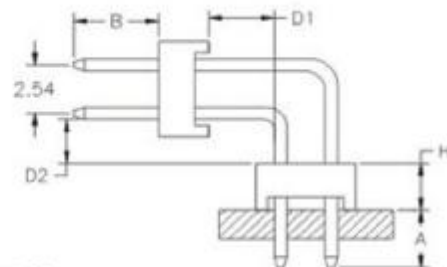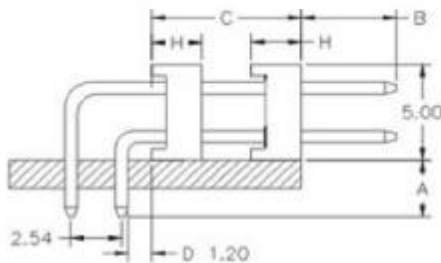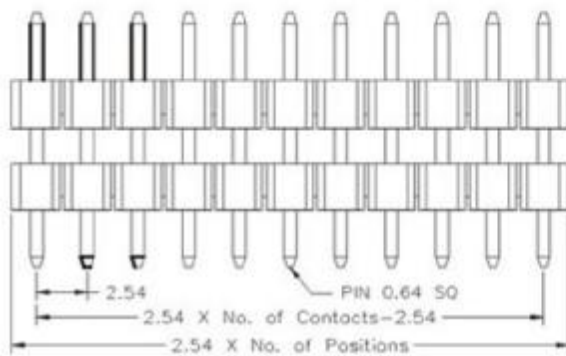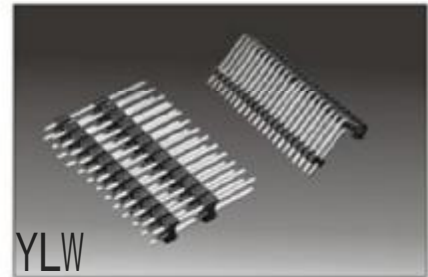

R1 Type

R2 Type

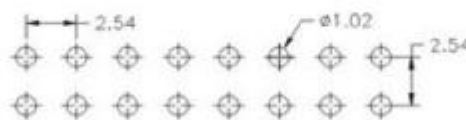

PCB LAYOUT

Ordering Information

1 1 25 — 2	2 XX	G0	S	XXX 01
Plastics Height 20=2.0mm 25=2.54mm	No. of Pins Per Row 01~40	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u ⁿ Gold G3 : 10u ⁿ Gold G4 : 15u ⁿ Gold G5 : 30u ⁿ Gold S0 : Gold Flash/Tin Standard: G0	Connector Type S=Straight S=Right Angle	Pin Length XXX=A+B+C XXX=A+D+C+B+1.25 XXX=A+B+D1+D2+2H+0.32

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢