





深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.54mm Board Spacer, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Brass
 Contact plating : Au or Sn over 50uⁿ Ni

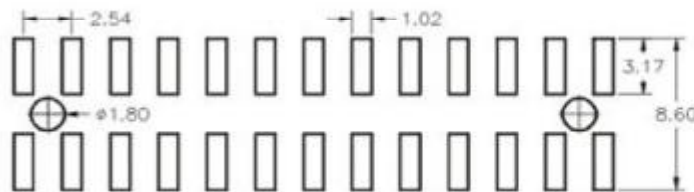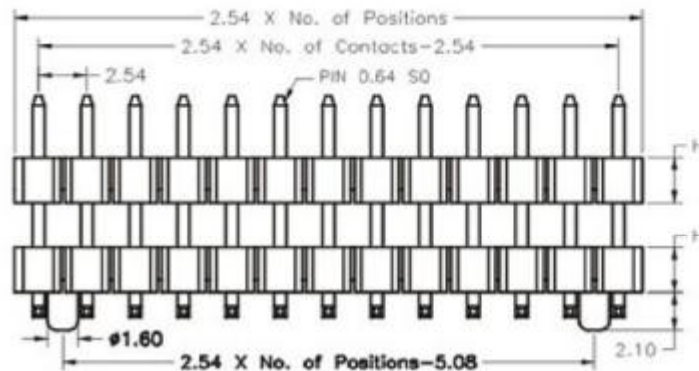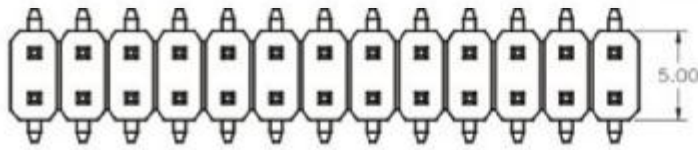

PCB LAYOUT

Ordering Information

1 1 25 — 2

Plastics Height
 20=2.0mm
 25=2.54mm

2 XX
 No. of Pins Per Row
 01~40

G0
 Contact Plating
 SN : Tin
 G0 : Gold Flash
 G2 : 5uⁿ Gold
 G3 : 10uⁿ Gold
 G4 : 15uⁿ Gold
 G5 : 30uⁿ Gold
 S0 : Gold Flash/Tin
 Standard: G0

M XXX 01
 Pin Length
 XXX=B+C+D+(W-2.54)/2

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢