


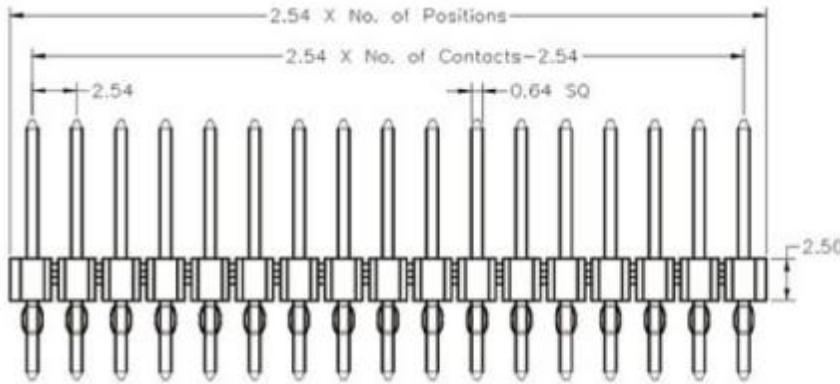


2.54mm Pin Header, Dual Row, Straight For Press Fit

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Brass
 Contact plating : Au or Sn over 50u* Ni



PCB LAYOUT

Ordering Information

1	1	25	—	1	2	<u>XX</u>	<u>G0</u>	S	<u>XXX</u>	01
				No. of Pins Per Row		Contact Plating		Pin Length		
				01~40		SN : Tin G0 : Gold Flash G2 : 5u* Gold G3 : 10u* Gold G4 : 15u* Gold G5 : 30u* Gold S0 : Gold Flash/Tin Standard: G0		XXX=A+B+2.50		

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢