



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

### 2.54mm Pin Header, Single Row, Right Angle, S.M.T

#### SPECIFICATIONS

Current Rating : 3AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: PBT  
 Contact Material : Brass  
 Contact plating : Au or Sn over 50u" Ni

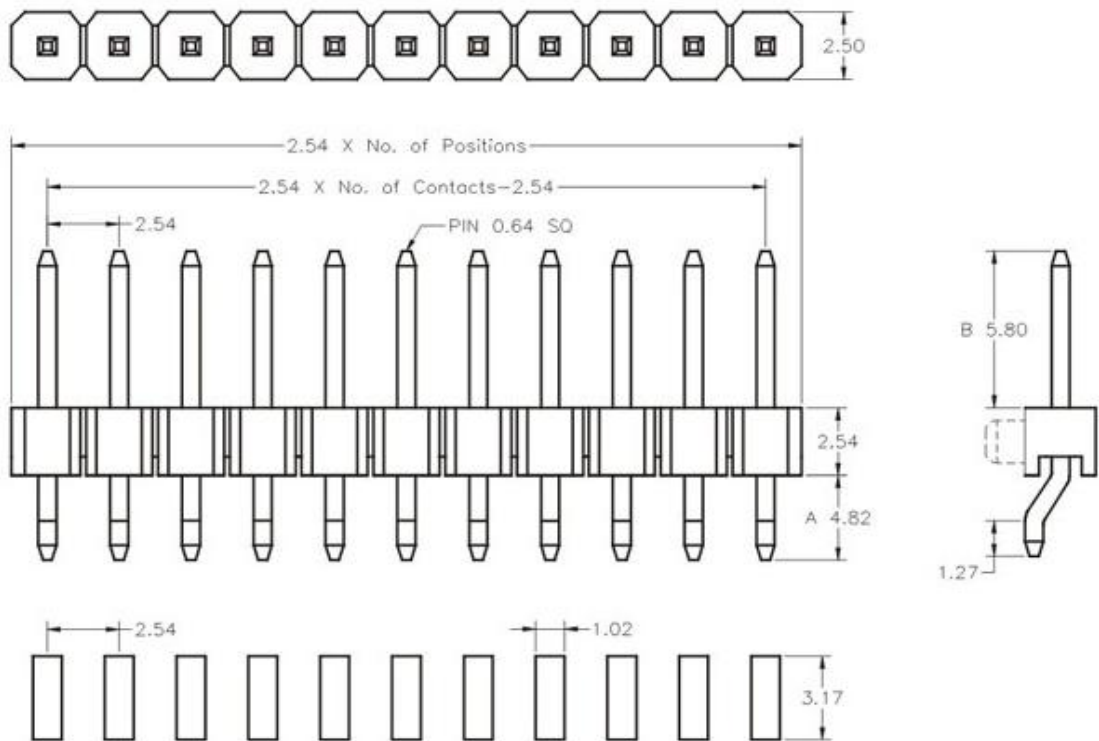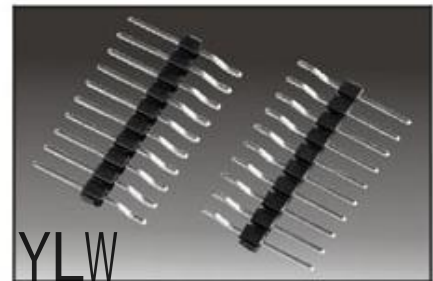

PCB LAYOUT

#### Ordering Information

1	1	25	—	1	1	XX	G0	Z	XXX	01
				No. of Pins Per Row	Contact Plating		Pin Length			
				01~40	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		XXX=B+A+2.80			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢