




深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

0.8*1.2mm Female Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 0.75AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 30mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : High Temperature Thermoplastic (UL94V-0)
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

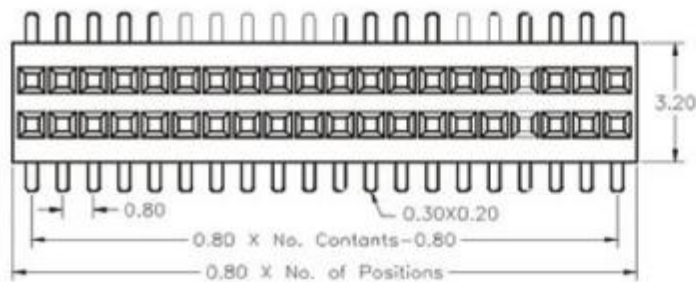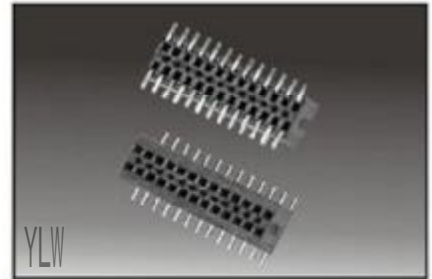

PCB LAYOUT

Ordering Information

2	6	31	—	2	XX	M	G0	C	T	N	01
					No. of Pins Per Row	Contact Plating	Material Type				
					03~50	G0 : Gold Flash	C: Nylon-6T				
						G2 : 5u" Gold	D: LCP				
						G3 : 10u" Gold	E: Nylon-46				
						G4 : 15u" Gold					
						G5 : 30u" Gold					
						S0 : Gold Flash/Tin					
						Standard: 00					

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢