



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

1. 27mm Female Header, Single Row, S. M. T

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au or Sn Over 50u" Ni

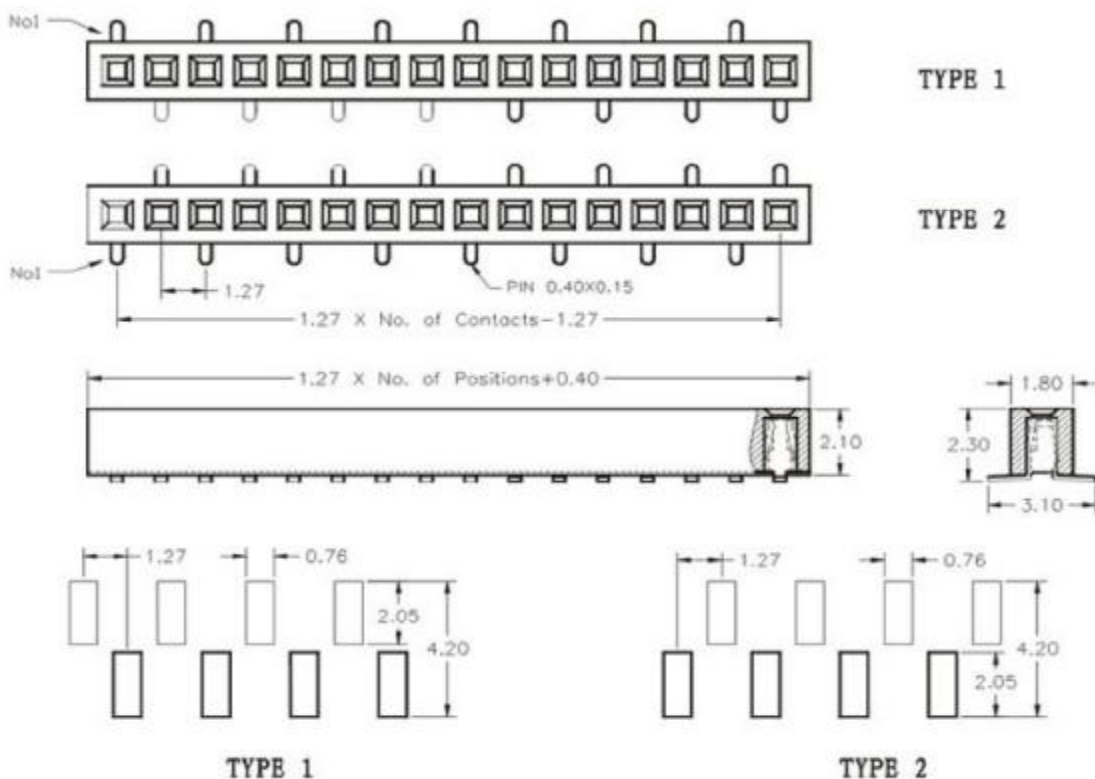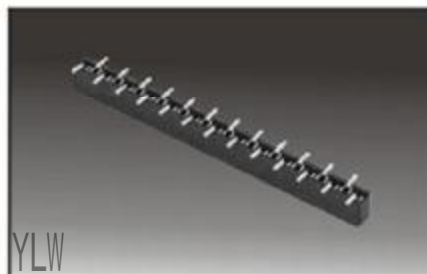

PCB LAYOUT

Ordering Information

| | | | | | | | | | | | |
|---|---|----|---|---|---------------------|---|--------------------------------------|---|---|---|----|
| 2 | 3 | 21 | — | 1 | XX | M | G0 | C | U | N | 01 |
| | | | | | No. of Pins Per Row | Contact Plating | Material Type | | | | |
| | | | | | 03~50 | G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0 | C: Nylon-6T D: LCP E: Nylon-46 | | | | |

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢