







深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

1. 27mm Female Header, Single/Dual Row, Straight

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au or Sn Over 50u" Ni

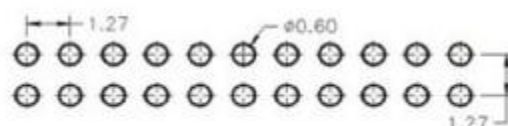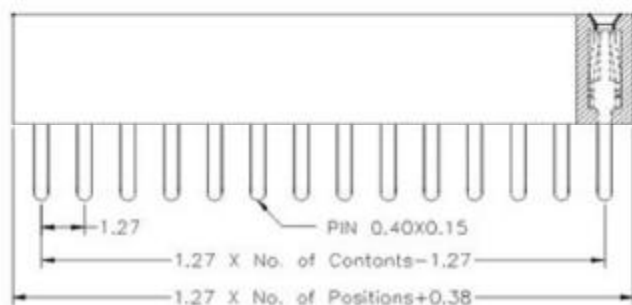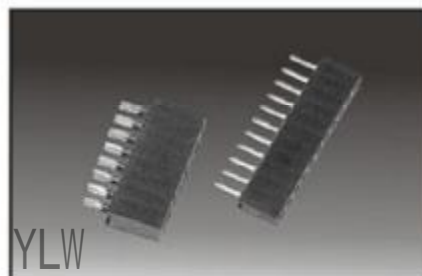

PCB LAYOUT

Ordering Information

2 3 34	—	2	XX	S	G0	C	U	N	01
Plastics Height		No. of Rows	No. of Pins Per Row	Contact Plating		Material Type			
21=2.1mm 34=3.4mm 44=4.4mm		1=Single Row 2=Dual Row	02~30	G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		C: Nylon-6T D: LCP E: Nylon-46			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢