



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.


1. 27mm Female Header, Single Row, S.M.T

SPECIFICATIONS




Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au or Sn Over 50u" Ni

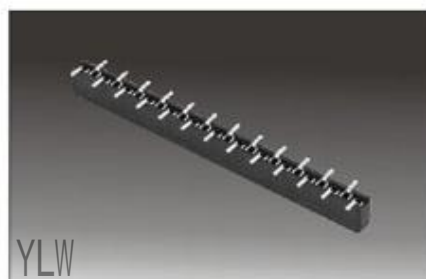


TYPE 1

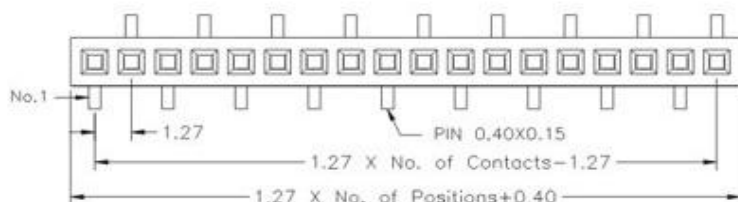

TYPE 2

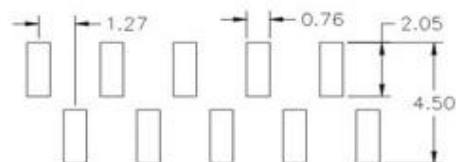

TYPE 1

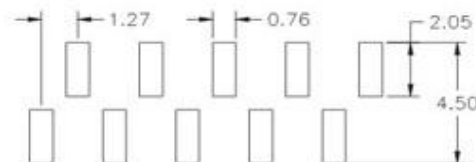

TYPE 2

PCB LAYOUT

Ordering Information

2 3 34	1	XX	M	G0	C	U N 01
Plastics Height 34=3.4mm 44=4.4mm	No. of Pins Per Row 03~50	Contact Plating G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	Material Type C: Nylon-6T D: LCP E: Nylon-46			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢