





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

### 1.27mm Female Header, Single Row, S. M. T

#### SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Phosphor Bronze  
 Contact plating : Au or Sn Over 50u<sup>2</sup> Ni

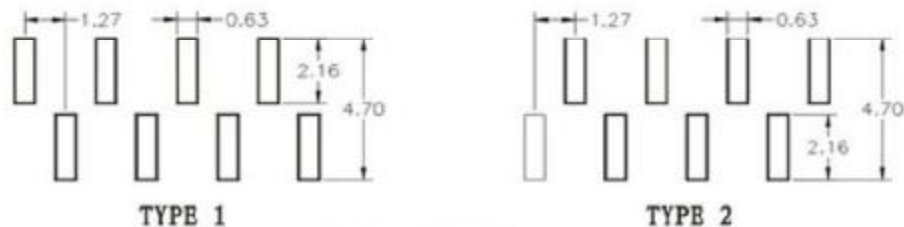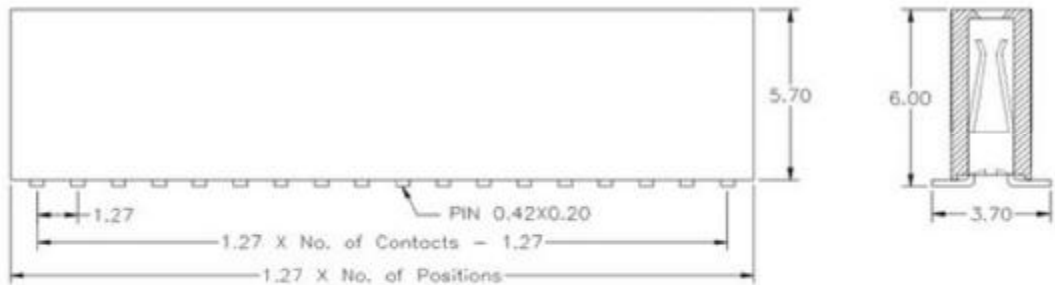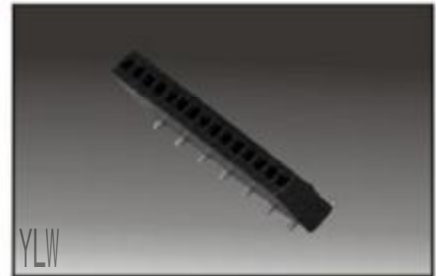

#### PCB LAYOUT

#### Ordering Information

2 3 57	—	1	<u>XX</u>	M	<u>G0</u>	<u>C</u>	U N 01
No. of Pins Per Row 03~50			Contact Plating G0 : Gold Flash G2 : 5u <sup>2</sup> Gold G3 : 10u <sup>2</sup> Gold G4 : 15u <sup>2</sup> Gold G5 : 30u <sup>2</sup> Gold S0 : Gold Flash/Tin Standard: G0			Material Type C: Nylon-6T D: LCP E: Nylon-46	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢