






# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.

### 1. 27mm Female Header, Dual Row, S. M. T

#### SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Phosphor Bronze  
 Contact plating : Au or Sn Over 50u" Ni

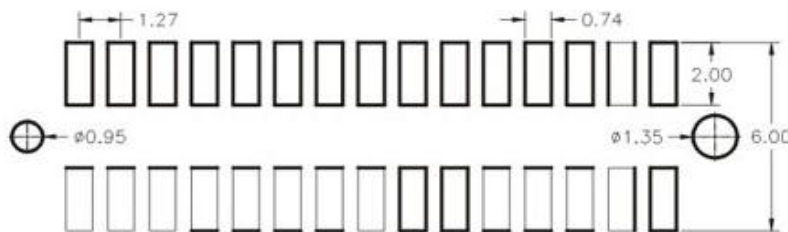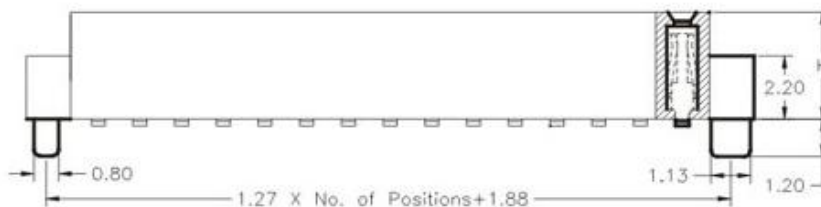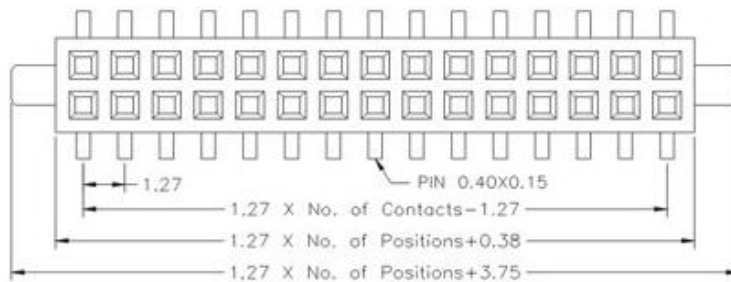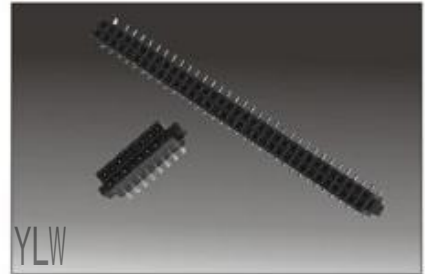

PCB LAYOUT

#### Ordering Information

|                      |   |                     |  |                                      |    |   |   |   |    |
|----------------------|---|---------------------|--|--------------------------------------|----|---|---|---|----|
| 2 3 34               | — | 2                   | XX   | M                                    | G0 | C | U | N | 01 |
| Plastics Height      |   | No. of Pins Per Row | Contact Plating  | Material Type                        |    |   |   |   |    |
| 34=3.4mm<br>44=4.4mm |   | 03~50               | G0 : Gold Flash<br>G1 : 3u" Gold<br>G2 : 5u" Gold<br>G3 : 10u" Gold<br>G4 : 15u" Gold<br>G5 : 30u" Gold<br>S0 : Gold Flash/Tin<br>Standard: G0 | C: Nylon-6T<br>D: LCP<br>E: Nylon-46 |    |   |   |   |    |

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢