






深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

1.27*2.54mm Female Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 1AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20m Ω Max.
 Insulation Resistance: 1000M Ω Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au or Sn Over 50u" Ni

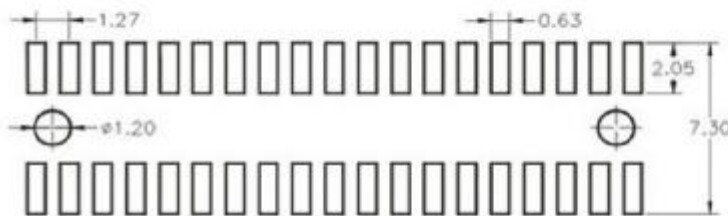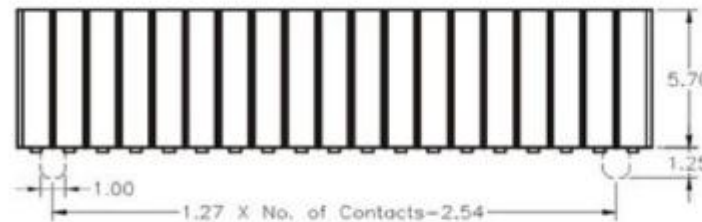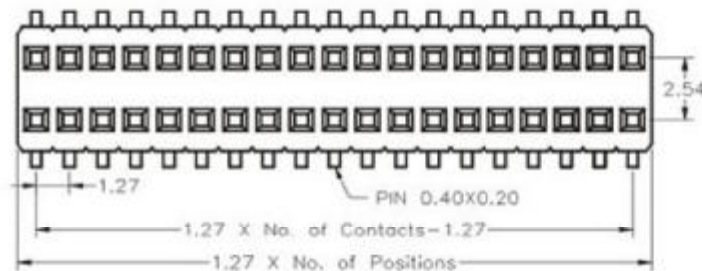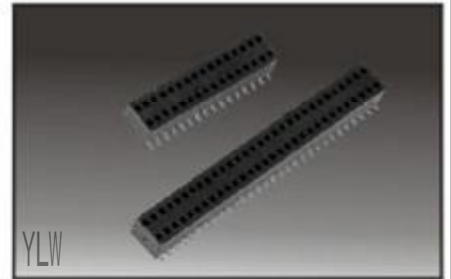

PCB LAYOUT

Ordering Information

2	4	57	—	2	XX	M	G0	C	U	N	01
					No. of Pins Per Row	Contact Plating	Material Type				
					03~50	G0 : Gold Flash G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin S3 : 10u" Gold/Tin S4 : 15u" Gold/Tin Standard: G0	B: Nylon-66 C: Nylon-6T D: LCP				

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢