





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 1.27\*2.54mm Female Header, Single/Dual Row, Straight

#### SPECIFICATIONS

Current Rating : 1AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-6T  
 Contact Material : Phosphor Bronze  
 Contact plating : Au or Sn Over 50u" Ni

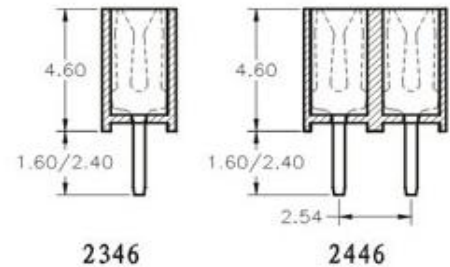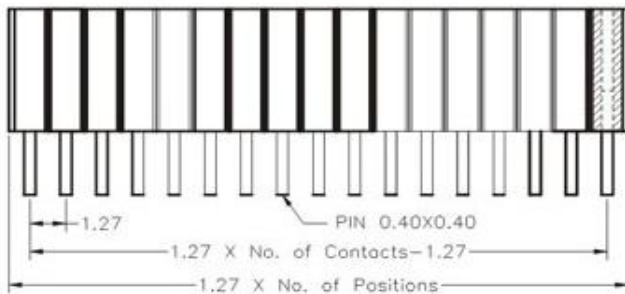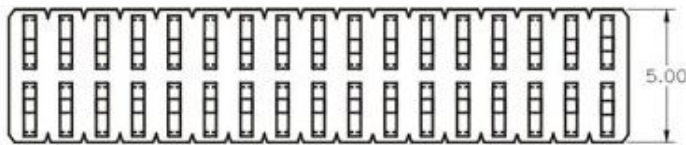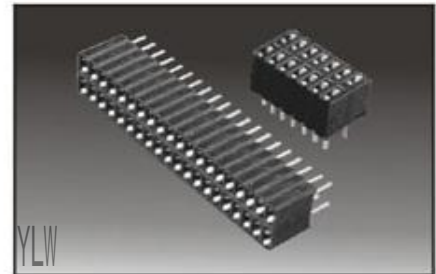

#### PCB LAYOUT

#### Ordering Information

2 4 (3) 46 — 2	XX	S	G0	B Y N	01
No. of Rows 1=Single Row 2=Dual Row	No. of Pins Per Row 01~50	Contact Plating G0 : Gold Flash G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin S3 : 10u" Gold/Tin S4 : 15u" Gold/Tin Standard: G0	Material Type B: Nylon-66 C: Nylon-6T D: LCP	Pin Length 01=2.40mm 02=1.60mm	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢