




深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.00mm Female Header, Single Row, Side Entry, S.M.T

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-6T
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

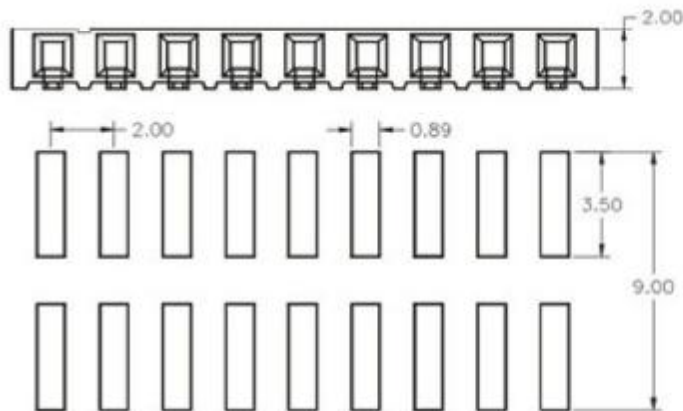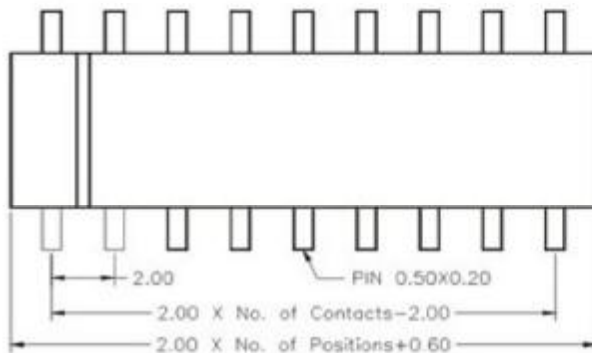

PCB LAYOUT

Ordering Information

2	2	20	—	1	<u>XX</u>	M	<u>G0</u>	<u>D</u>	U	N	01
					No. of Pins Per Row	Contact Plating	Material Type				
					02~40	SN : Tin	C: Nylon-6T				
						G0 : Gold Flash	D: LCP				
						G2 : 5u" Gold					
						G3 : 10u" Gold					
						G4 : 15u" Gold					
						G5 : 30u" Gold					
						S0 : Gold Flash/Tin					
						Standard: G0					

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢