



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.



2.00mm Female Header, Dual Row, Straight

SPECIFICATIONS



Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

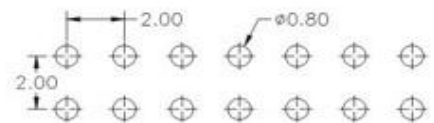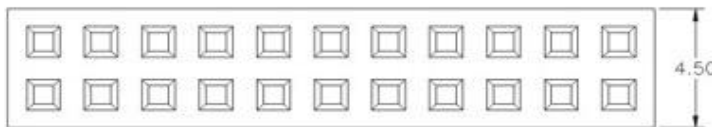

PCB LAYOUT

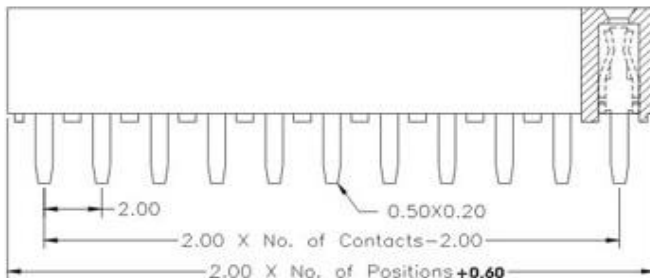

Type 1

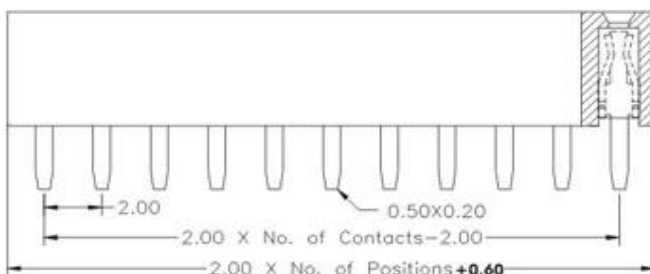

Type 2

Ordering Information

2 2 43 — 2	XX	S	G0	B	U	N	01
Plastics Height	No. of Pins Per Row	Contact Plating	Material Type	Pin Length			
40=4.0mm 43=4.3mm 46=4.6mm	02~40	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	B: Nylon-66 C: Nylon-6T D: LCP	01=2.70mm 02=2.40mm			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢