

深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.


2.00mm Female Header, Single Row, Bottom Entry

SPECIFICATIONS




Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni




TYPE 1

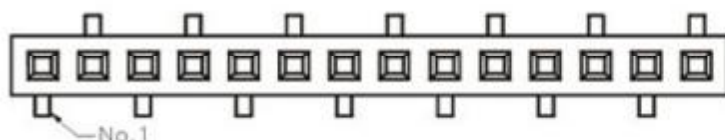

TYPE 2

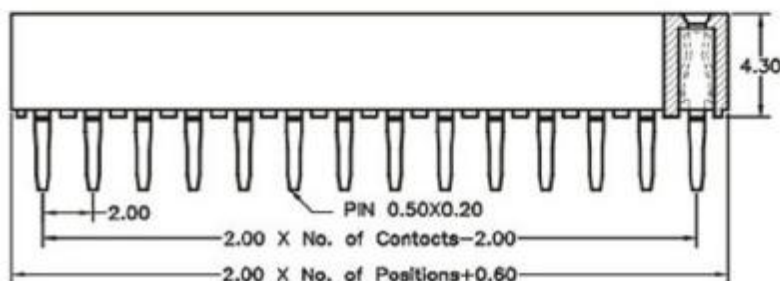

TYPE 1

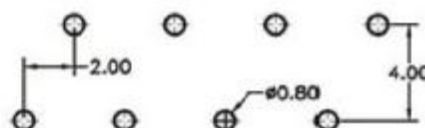

TYPE 2

PCB LAYOUT

Ordering Information

2 2 43 — 1 XX W G0 B U N 01

No. of Pins Per Row
02~40

Contact Plating
 SN : Tin
 G0 : Gold Flash
 G2 : 5u" Gold
 G3 : 10u" Gold
 G4 : 15u" Gold
 G5 : 30u" Gold
 S0 : Gold Flash/Tin
 Standard: G0

Material Type
 B: Nylon-66
 C: Nylon-6T
 D: LCP

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢