






深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.00mm Female Header, Dual Row, Bottom Entry

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 uⁿ Ni

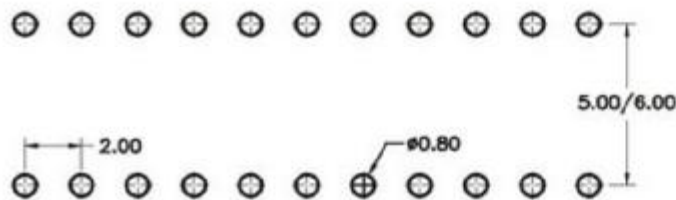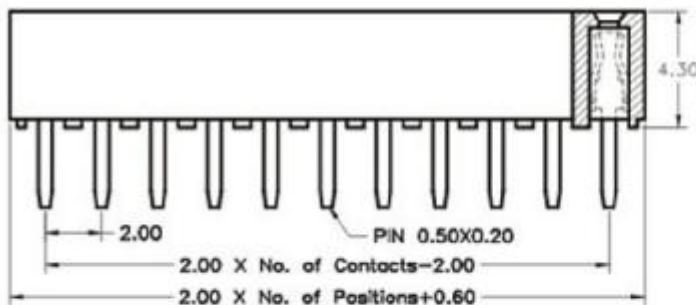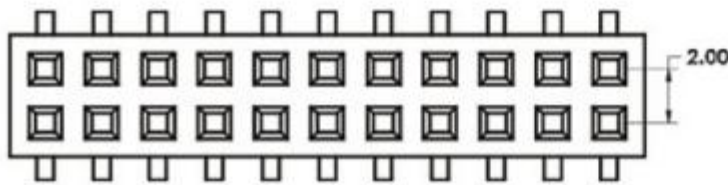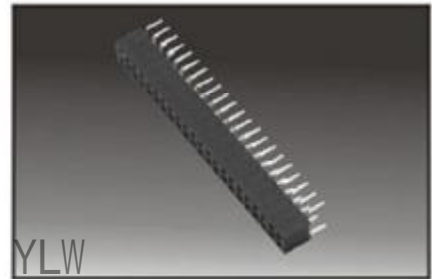

PCB LAYOUT

Ordering Information

2 2 43 — 2

XX

W

G0

B

U

N

01

No. of Pins Per Row
02~40

Contact Plating
 SN : Tin
 G0 : Gold Flash
 G2 : 5uⁿ Gold
 G3 : 10uⁿ Gold
 G4 : 15uⁿ Gold
 G5 : 30uⁿ Gold
 S0 : Gold Flash/Tin
 Standard: G0

Material Type
 B: Nylon-66
 C: Nylon-6T
 D: LCP

Pin Length
 01=6.00mm
 02=5.00mm

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢