







深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.00mm Female Header, Dual Row, Straddle

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

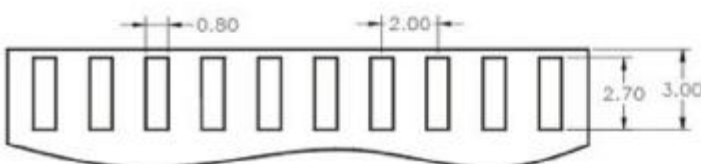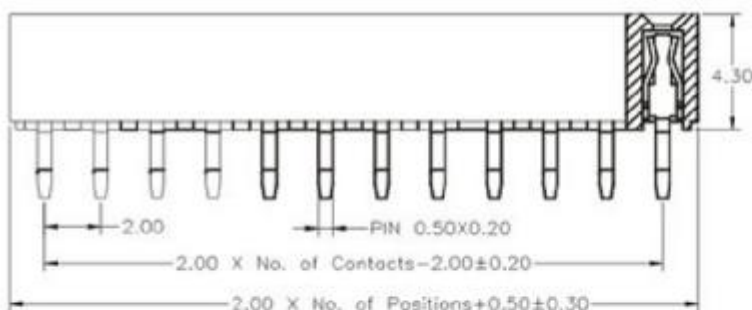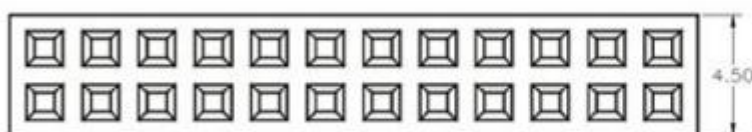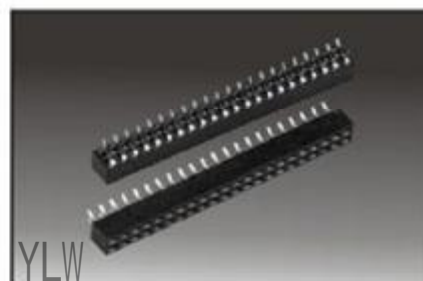

PCB LAYOUT

Ordering Information

2 2 43	—	2	XX	C	G0	B	U	N	01
		No. of Pins Per Row		Contact Plating		Material Type			
		02~40		SN : Tin		A: PBT			
				G0 : Gold Flash		B: Nylon-66			
				G2 : 5u" Gold		C: Nylon-6T			
				G3 : 10u" Gold					
				G4 : 15u" Gold					
				G5 : 30u" Gold					
				S0 : Gold Flash/Tin					
				Standard: G0					

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢