







深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.00mm Female Header, Dual Row, Side Entry

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

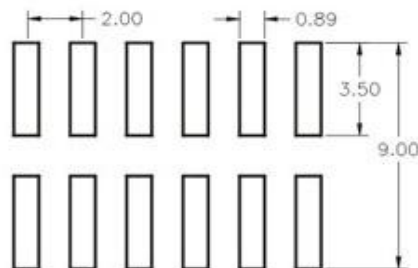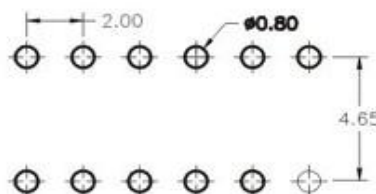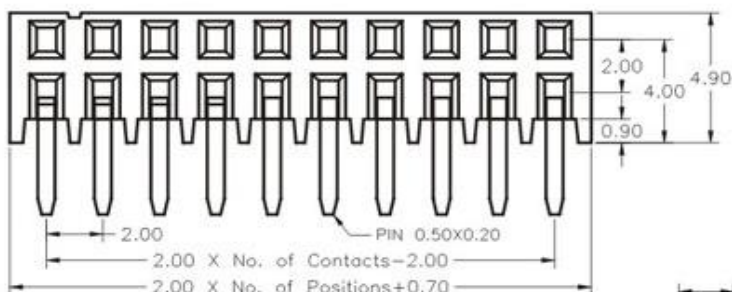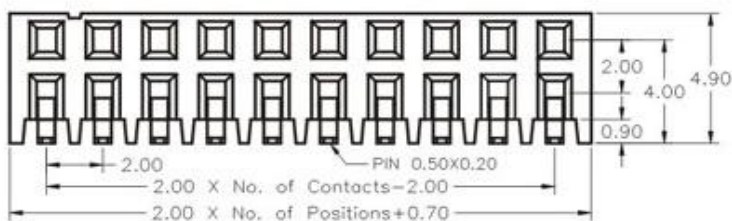

PCB LAYOUT

Ordering Information

2 2 49	—	2	<u>XX</u>	<u>R</u>	<u>G0</u>	<u>B</u> <u>U</u> <u>N</u> 01
		No. of Pins Per Row	Connector Type	Contact Plating	Material Type	
		02~40	R=Right Angle M=S. M. T	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	B: Nylon-66 C: Nylon-6T D: LCP	

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢