



# 深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

## 2.00mm Female Header, Dual Row, Straight

### SPECIFICATIONS

Current Rating : 1.5AMP  
Operation Temperature: -40° C to +105° C  
Contact Resistance : 20mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Withstanding Voltage : AC 500V  
Insulator Material : Polyester (UL94V-0)  
Standard: Nylon-66  
Contact Material : Phosphor Bronze  
Contact plating : Au over 50 u" Ni

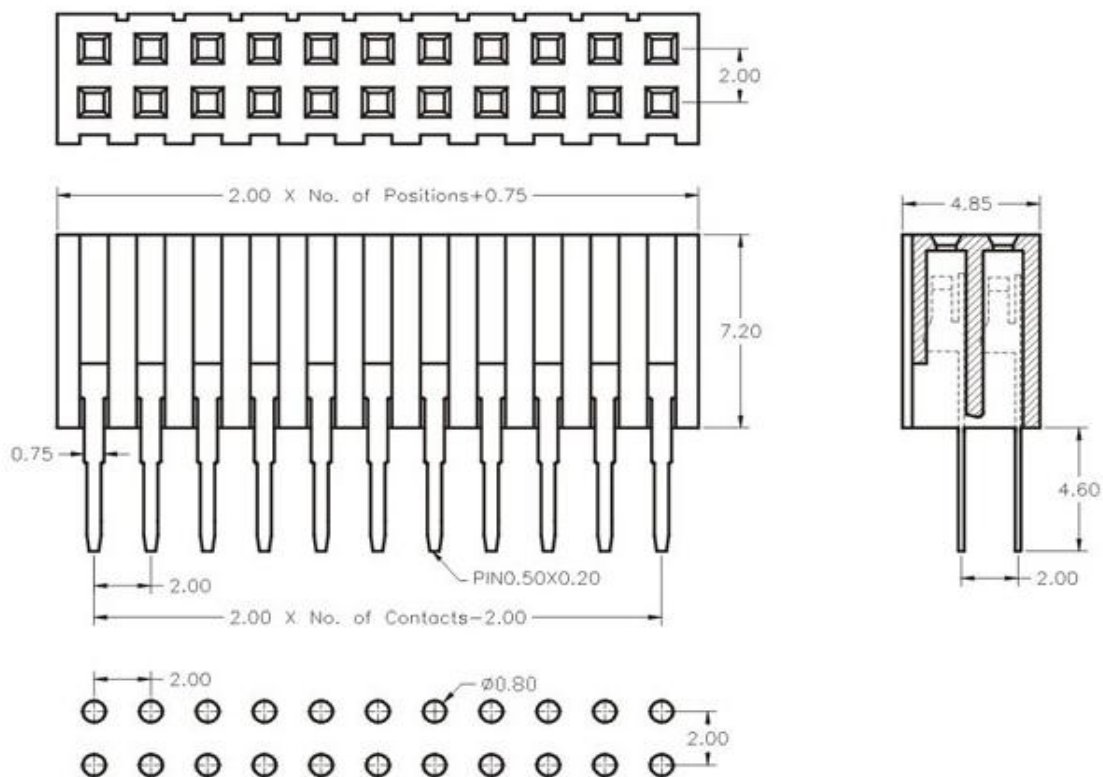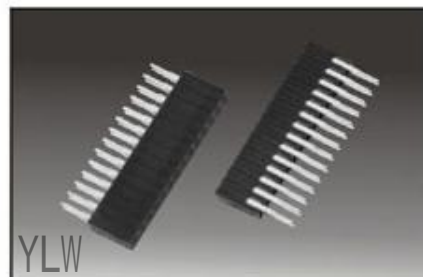

PCB LAYOUT

### Ordering Information

2 2 72 — 2	XX	S	G0	B	U	N	01
No. of Pins Per Row 02~40	Contact Plating SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0	Material Type B: Nylon-66 C: Nylon-6T D: LCP					

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢