




深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.00mm Female Header, Dual Row, Right Angle

SPECIFICATIONS

Current Rating : 1.5AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 500V
 Insulator Material : Polyester (UL94V-0)
 Standard: Nylon-66
 Contact Material : Phosphor Bronze
 Contact plating : Au over 50 u" Ni

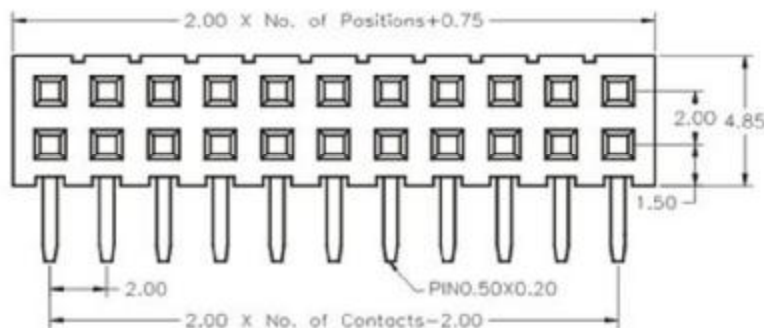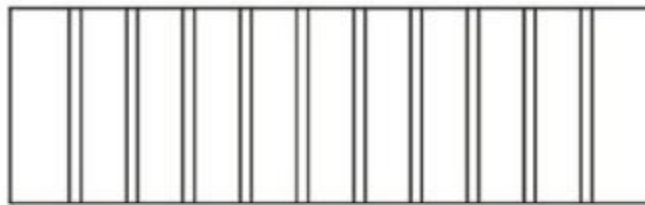

PCB LAYOUT

Ordering Information

2	2	72	—	2	XX	R	G0	B	U	N	01
				No. of Pins Per Row	Contact Plating	Material Type					
				02~40	SN : Tin	B: Nylon-66					
					G0 : Gold Flssh	C: Nylon-6T					
					G2 : 5u" Gold	D: LCP					
					G3 : 10u" Gold						
					G4 : 15u" Gold						
					G5 : 30u" Gold						
					S0 : Gold Flash/Tin						
					Standard: G0						

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址 : 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢