




深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.54mm Female Header, Single Row, Right Angle

SPECIFICATIONS

Current Rating : 3AMP
Operation Temperature: -40° C to +105° C
Contact Resistance : 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : AC 1000V
Insulator Material : Polyester (UL94V-0)
Standard: Nylon-66
Contact Material : Phosphor bronze
Contact plating : Au or Sn over 50u² Ni

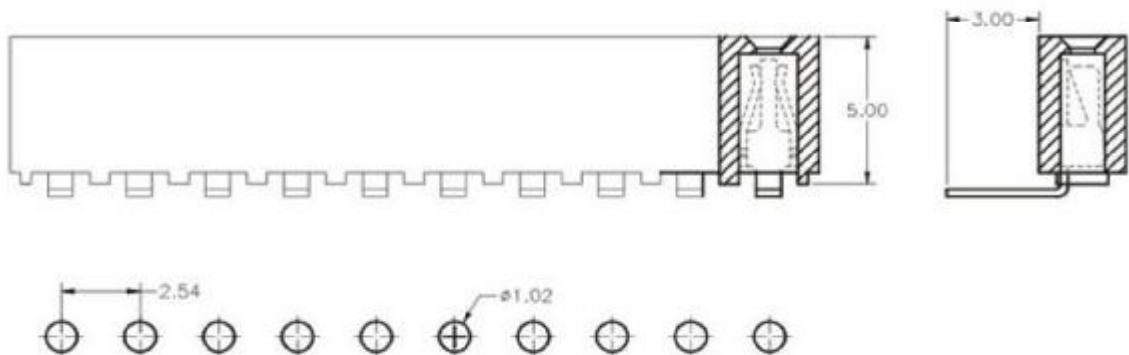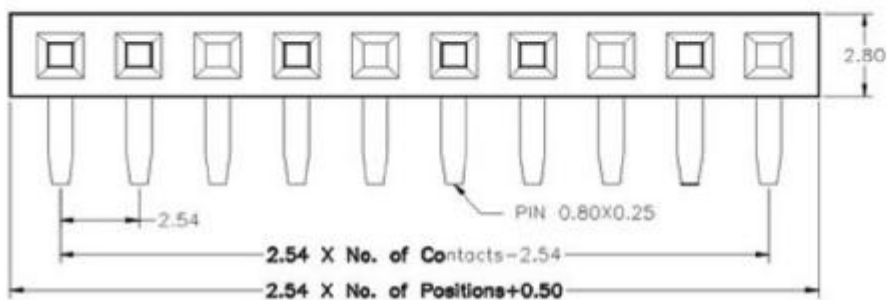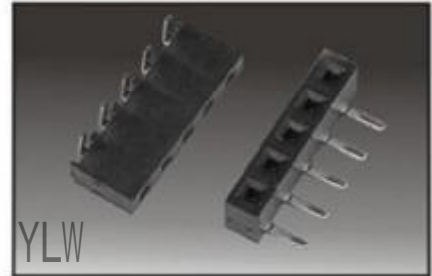

PCB LAYOUT

Ordering Information

2	1	50	—	1	<u>XX</u>	R	<u>G0</u>	<u>B</u>	U	N	01
					No. of Pins Per Row	Contact Plating	Material Type				
					02~40	SN : Tin G0 : Gold Flash G2 : 5u ² Gold G3 : 10u ² Gold G4 : 15u ² Gold G5 : 30u ² Gold S0 : Gold Flash/Tin Standard: G0	B: Nylon-66 C: Nylon-6T D: LCP				

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢