





深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.54mm Female Header, Dual Row, S. M. T

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94Y-0)
 Standard: Nylon-6T
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

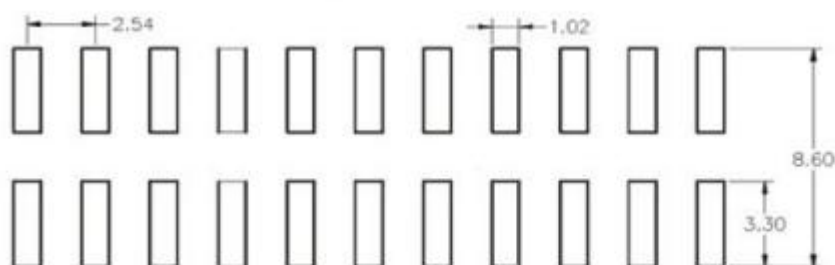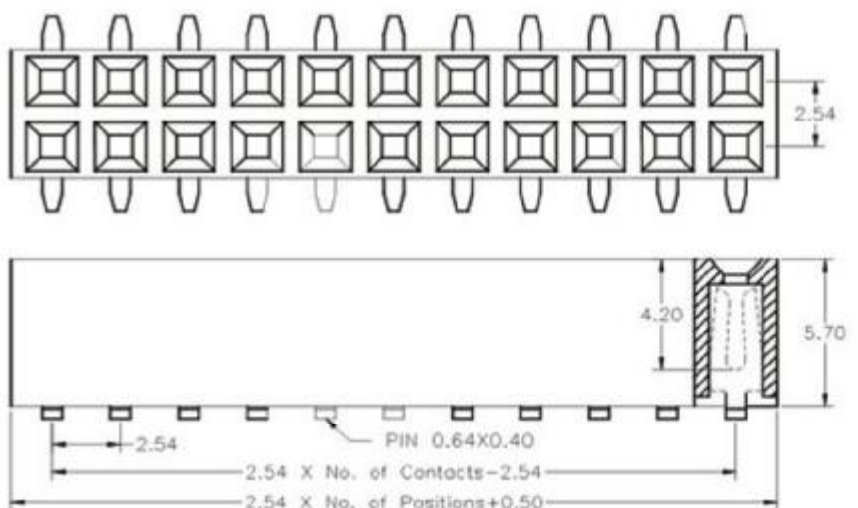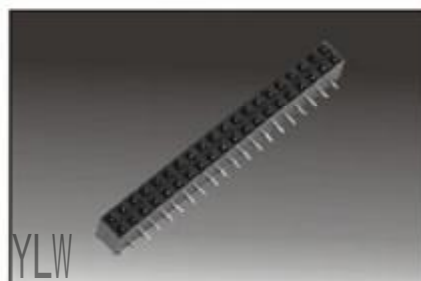

PCB LAYOUT

Ordering Information

2	1	57	—	2	<u>XX</u>	M	<u>G0</u>	<u>C</u>	Y	N	01
					No. of Pins Per Row	Contact Plating	Material Type				
					02~40	SN : Tin	C: Nylon-6T				
						G0 : Gold Flash	D: LCP				
						G2 : 5u" Gold					
						G3 : 10u" Gold					
						G4 : 15u" Gold					
						G5 : 30u" Gold					
						S0 : Gold Flash/Tin					
						Standard: G0					

Tel: 86-0755-27367782

Fax: 86-0755-27382610

Http://www.szyLconn.com

E-mail: sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢