2.54mm Female Header, Dual Row, Straight

SPECIFICATIONS

Current Rating : 3AMP
Operation Temperature: -40° C to+105° C
Contact Resistance : 20mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage : AC 1000V
Insulator Material : Polyester (UL94V-0)
Standard: PBT
Contact Material : Phosphor bronze
Contact plating : Au or Sn over 50u" Ni

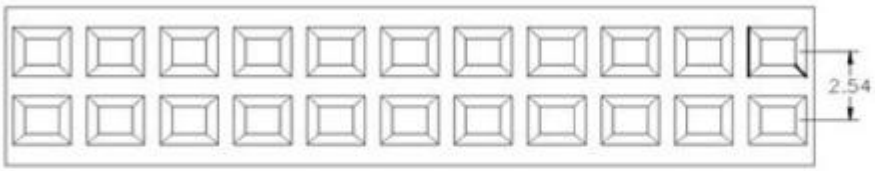

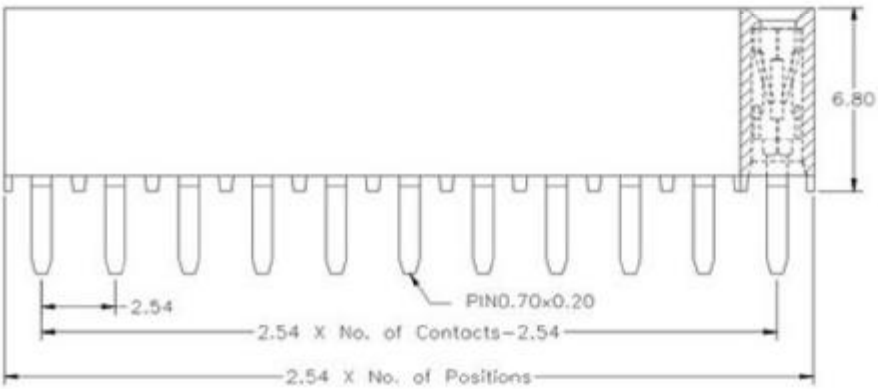

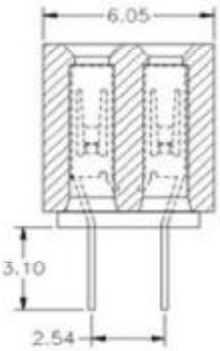

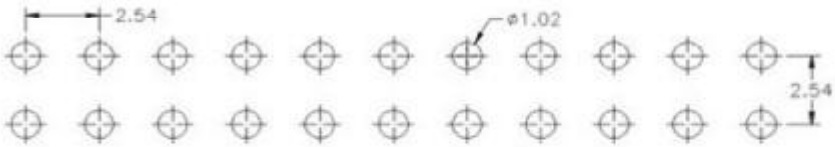

PCB LAYOUT

Ordering Information

2 1 68 — 2 XX S G0 A U N 02

No. of Pins Per Row
02~40

Contact Plating
G0 : Gold Flash
G3 : 10u" Gold
G4 : 15u" Gold
S0 : Gold Flash/Tin
S3 : 10u" Gold/Tin
S4 : 15u" Gold/Tin
S5 : 30u" Gold/Tin
Standard: S0

Material Type
A: PBT
B: Nylon-66
C: Nylon-6T
D: LCP

Tel:86-0755-27367782 Fax:86-0755-27382610
Http://www.szyLconn.com E-mail:sales@szyLconn.com
地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢