



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.54mm Female Header, Single/Dual Row, Straight

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u² Ni

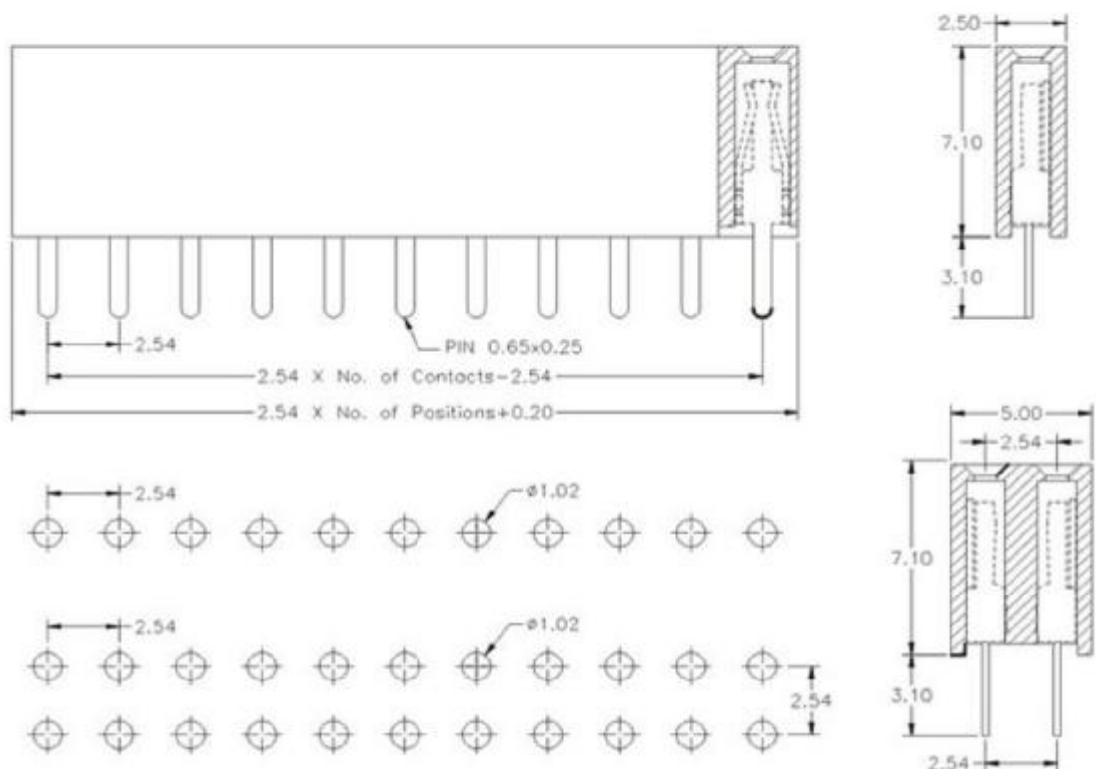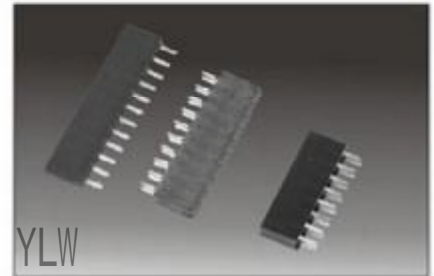

PCB LAYOUT

Ordering Information

2	1	71	—	2	XX	S	G0	B	U	N	01
No. of Rows				No. of Pins Per Row			Contact Plating	Material Type			
1=Single Row				02~40			SN : Tin	A: PBT			
2=Dual Row							G0 : Gold Flash	B: Nylon-66			
							G2 : 5u ² Gold	C: Nylon-6T			
							G3 : 10u ² Gold	D: LCP			
							G4 : 15u ² Gold				
							G5 : 30u ² Gold				
							S0 : Gold Flash/Tin				
							Standard: G0				

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : //www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢