



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

2.54mm Female Header, Single/Dual Row, Straight

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

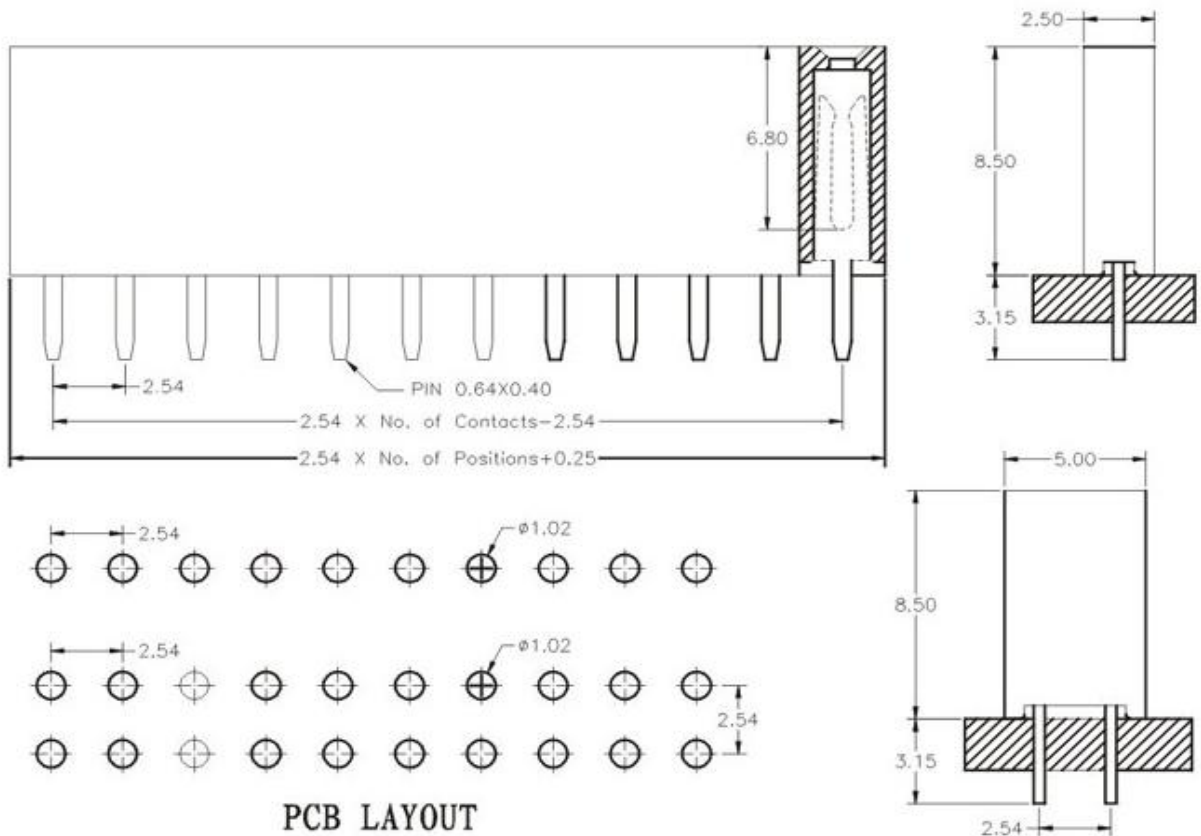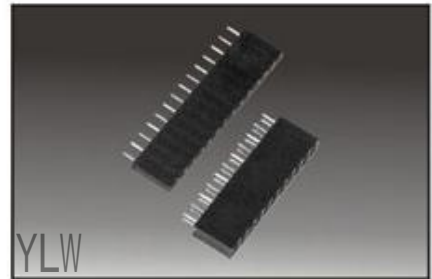

PCB LAYOUT

Ordering Information

2	1	85	—	2	XX	S	G0	A	Y	N	01
No. of Rows				No. of Pins Per Row	Contact Plating		Material Type				
1=Single Row				02~40	SN : Tin		A: PBT				
2=Dual Row					G0 : Gold Flash		B: Nylon-66				
					G2 : 5u" Gold		C: Nylon-6T				
					G3 : 10u" Gold		D: LCP				
					G4 : 15u" Gold						
					G5 : 30u" Gold						
					S0 : Gold Flash/Tin						
					Standard: G0						

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢