



深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO., LTD.

2.54mm Female Header, Single/Dual Row, Straight

SPECIFICATIONS

Current Rating : 3AMP
 Operation Temperature: -40° C to +105° C
 Contact Resistance : 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage : AC 1000V
 Insulator Material : Polyester (UL94V-0)
 Standard: PBT
 Contact Material : Phosphor bronze
 Contact plating : Au or Sn over 50u" Ni

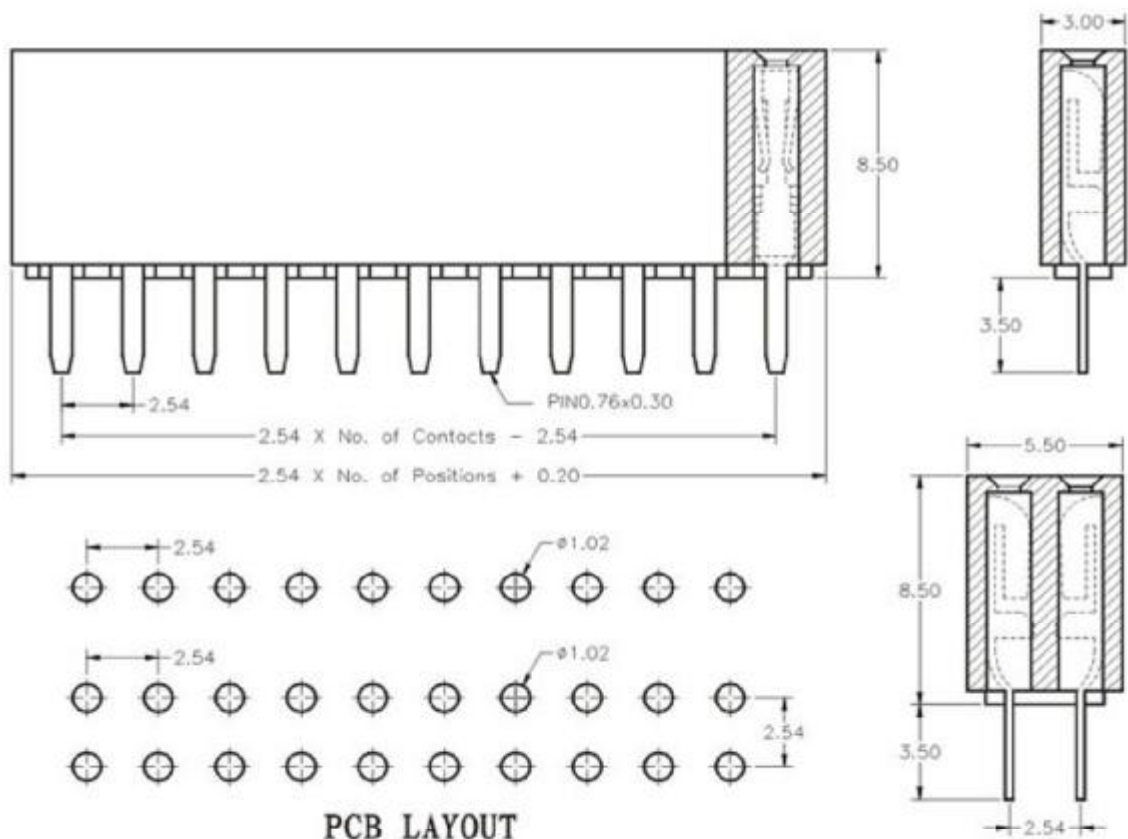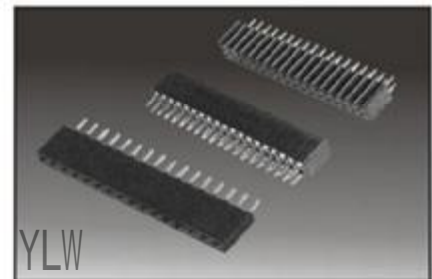

PCB LAYOUT

Ordering Information

2 1 85	—	2	XX	S	G0	A	U	N	01
		No. of Rows	No. of Pins Per Row	Contact Plating		Material Type			
		1=Single Row 2=Dual Row	02~40	SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		A: PBT B: Nylon-66 C: Nylon-6T D: LCP			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail : sales@szyLconn.com

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢