





# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 2.54mm Female Header, Single Row, Bottom Entry

#### SPECIFICATIONS

Current Rating : 3AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-66  
 Contact Material : Phosphor bronze  
 Contact plating : Au or Sn over 50u\* Ni

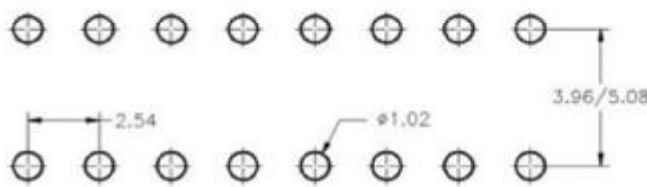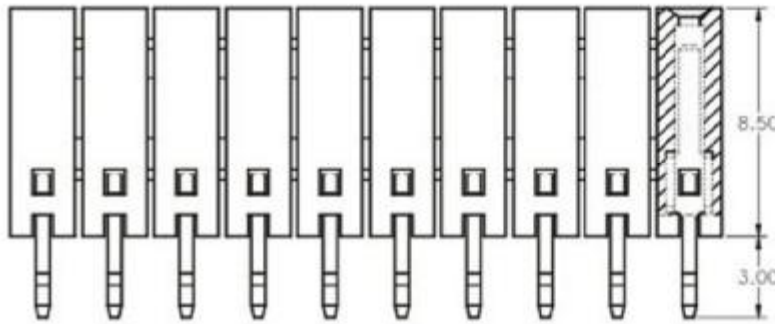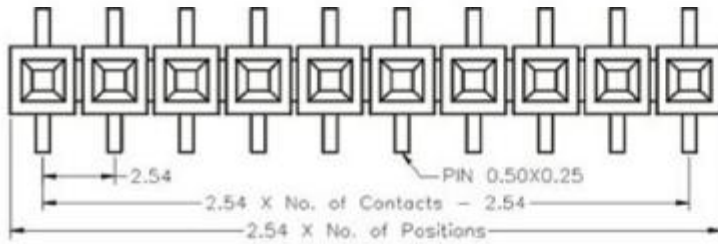

PCB LAYOUT

#### Ordering Information

2	1	85	—	1	<u>XX</u>	W	<u>G0</u>	<u>B</u>	T	N	01
					No. of Pins Per Row	Contact Plating		Material Type			
					02~40	SN : Tin G0 : Gold Flash G2 : 5u* Gold G3 : 10u* Gold G4 : 15u* Gold G5 : 30u* Gold S0 : Gold Flash/Tin Standard: G0		B: Nylon-66 C: Nylon-6T D: LCP			

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢