



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO., LTD.



### 2.54mm Female Header, Dual Row, Bottom Entry

#### SPECIFICATIONS

Current Rating : 3AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: Nylon-66  
 Contact Material : Phosphor bronze  
 Contact plating : Au or Sn over 50u" Ni

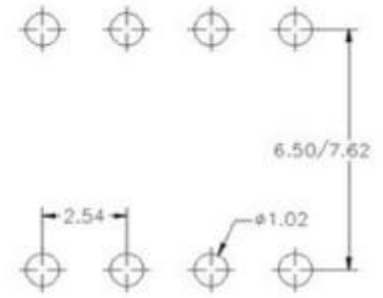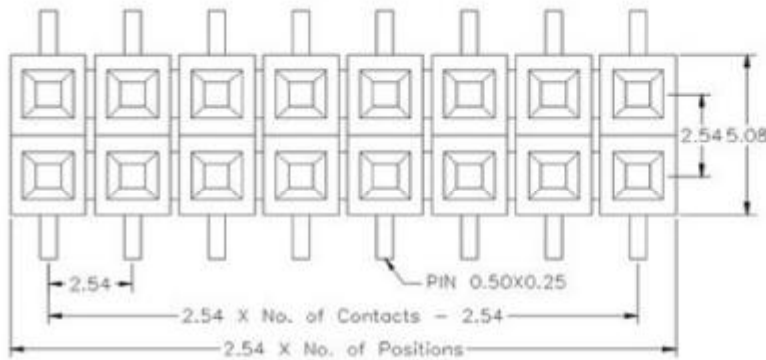

PCB LAYOUT

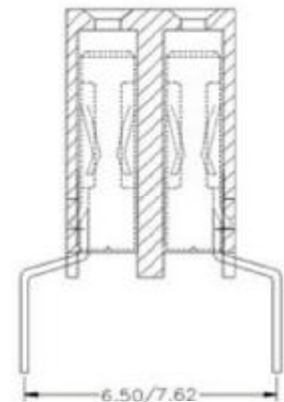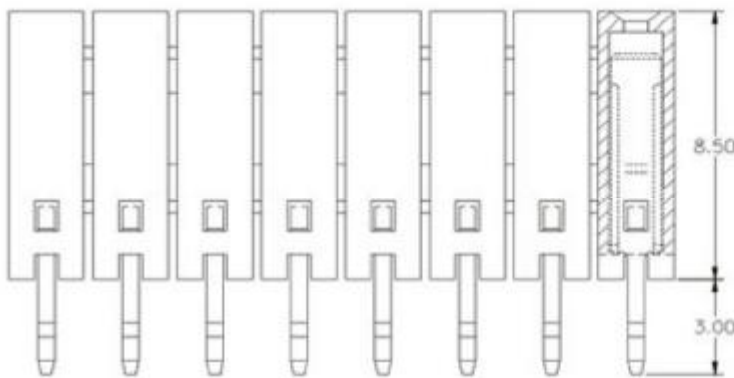

#### Ordering Information

2 1 85	—	2	XX	W	G0	B	U	N	01
No. of Pins Per Row		Contact Plating		Material Type					
02~40		SN : Tin G0 : Gold Flash G2 : 5u" Gold G3 : 10u" Gold G4 : 15u" Gold G5 : 30u" Gold S0 : Gold Flash/Tin Standard: G0		B: Nylon-66 C: Nylon-6T D: LCP					

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http : [www.szyLconn.com](http://www.szyLconn.com)

E-mail : [sales@szyLconn.com](mailto:sales@szyLconn.com)

地址: 广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢