



# 深圳市永连旺电子有限公司

## Shenzhen Yonglianwang Electronic CO.,LTD.

### 2.54mm Female Header, Dual Row, Straight (PC104)

#### SPECIFICATIONS

Current Rating : 3AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 1000V  
 Insulator Material : Polyester (UL94V-0)  
 Standard: PBT  
 Contact Material : Phosphor bronze  
 Contact plating : Au or Sn over 50u<sup>n</sup> Ni

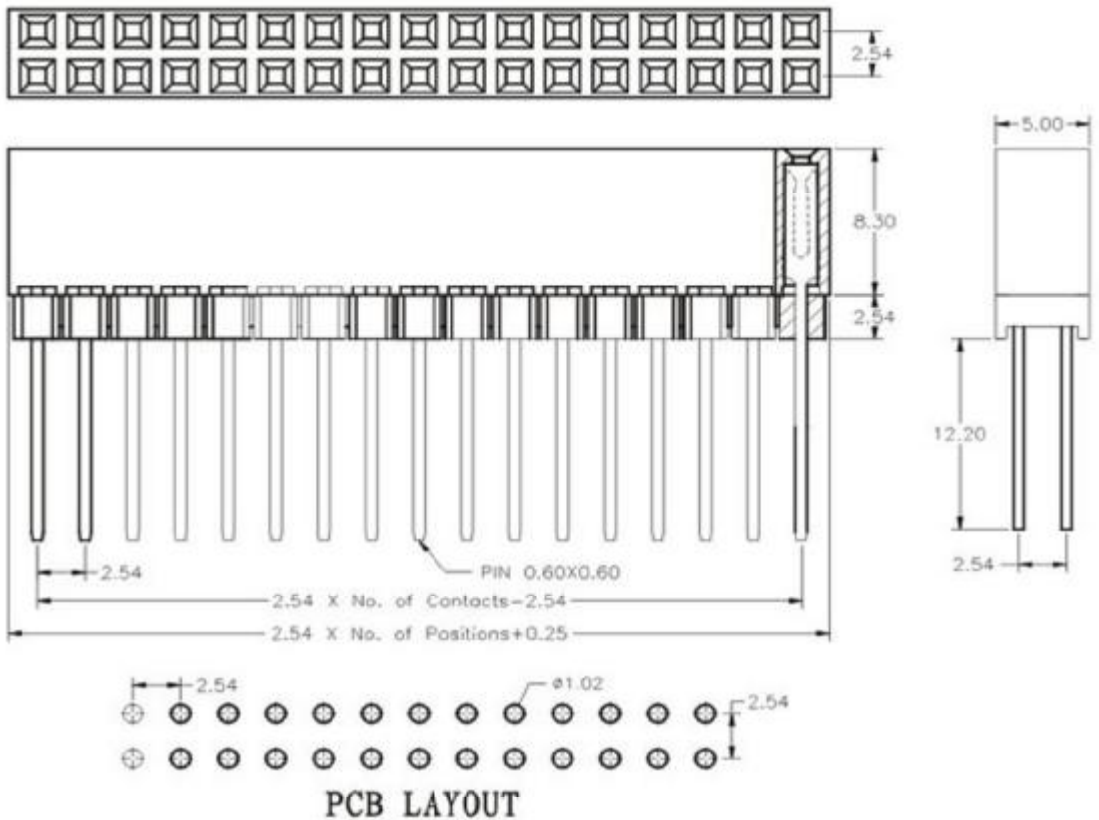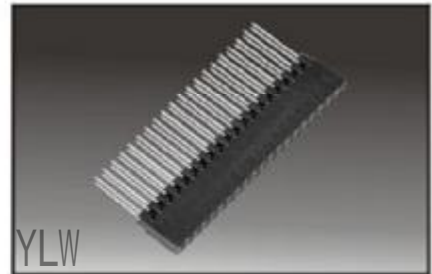

#### Ordering Information

2	1	83	—	2	<u>XX</u>	S	<u>G0</u>	<u>A</u>	Y	N	01
					No. of Pins Per Row	Contact Plating	Material Type				
					02~40	G0 : Gold Flash	A: PBT				
						G2 : 5u <sup>n</sup> Gold	B: Nylon-66				
						G3 : 10u <sup>n</sup> Gold	C: Nylon-6T				
						G4 : 15u <sup>n</sup> Gold					
						G5 : 30u <sup>n</sup> Gold					
						S0 : Gold Flash/Tin					
						Standard: G0					

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢