



# 深圳市永连旺电子有限公司

Shenzhen Yonglianwang Electronic CO.,LTD.

## 2.54mm Female Header, Dual Row, Straight (PC104)

### SPECIFICATIONS

Current Rating : 3AMP  
Operation Temperature: -40° C to +105° C  
Contact Resistance : 20mΩ Max.  
Insulation Resistance: 1000MΩ Min.  
Withstanding Voltage : AC 1000V  
Insulator Material : Polyester (UL94V-0)  
Standard: PBT  
Contact Material : Phosphor bronze  
Contact plating : Au or Sn over 50u\* Ni

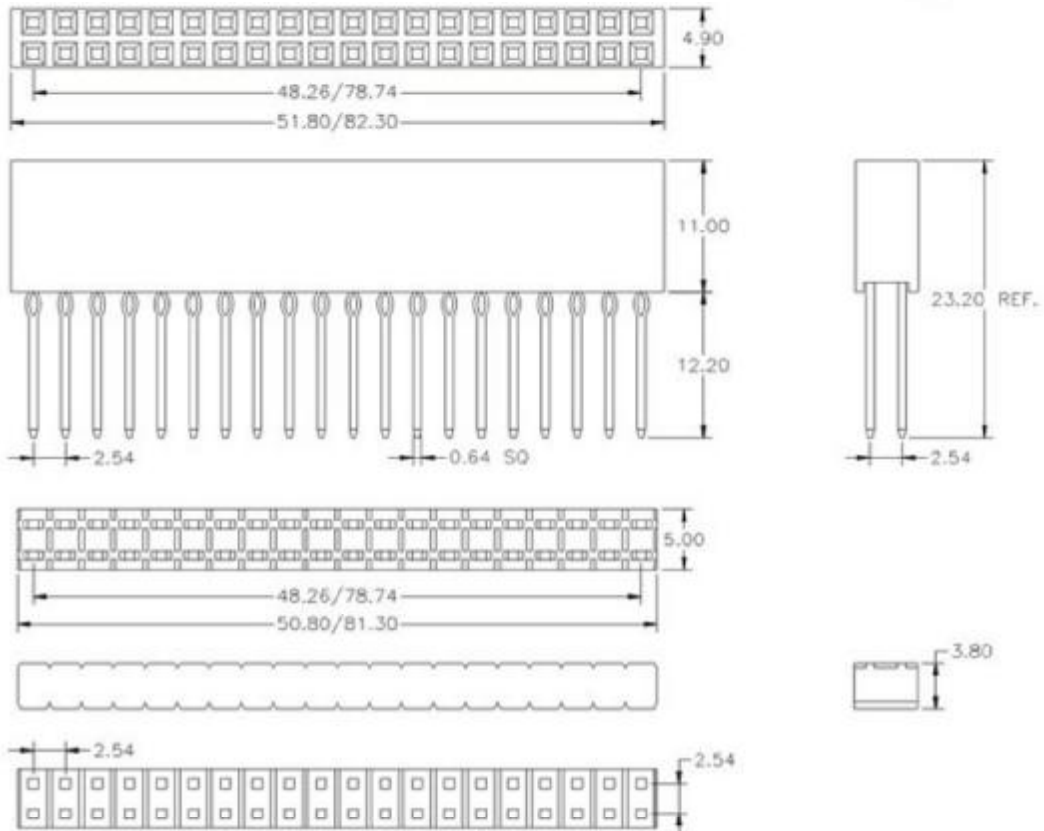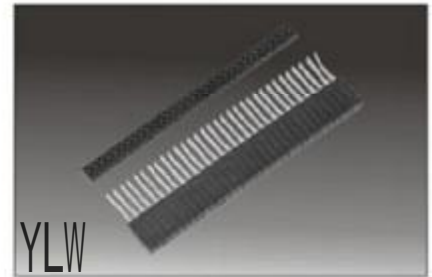

### Ordering Information

2	1	11	-	2		XX	S		G0		A	Y	N	02
				No. of Pins Per Row				Contact Plating			Material Type			
				20 32P				G0 : Gold Flash			A: PBT			
								G2 : 5u* Gold			B: Nylon-66			
								G3 : 10u* Gold			C: Nylon-6T			
								G4 : 15u* Gold						
								G5 : 30u* Gold						
								S0 : Gold Flash/Tin						
								Standard: G0						

Tel : 86-0755-27367782

Fax : 86-0755-27382610

Http://www.szyLconn.com

E-mail:sales@szyLconn.com

地址:广东省深圳市宝安区福永街道兴围第一工业区兴华路北第17幢